



TEST REPORT



Report No. : KES-EM240684
Page 1 / 80

KES Co., Ltd.
#3002, #3503, #3701, 40, Simin-daero365beon-gil,,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057,
Republic of Korea
Tel : +82-31-425-6200, Fax: +82-31-425-6200

1. Client

Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do,
Republic of Korea

2. Sample Description

Product name : NETWORK CAMERA
Model/Type No. : XNF-9013RV
Variant Model : -
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward,
Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea
(Suwon Industrial Complex)

3. Date of Receipt : Jan. 29, 2024

4. Test date : Mar. 04, 2024 ~ Mar. 06, 2024

5. Date of Issue : Mar. 15, 2024

6. Test Results : In Compliance

Tested by

Reviewed by

Jae Won, Lee
EMC Test Engineer

Dae Jung, Choi
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Mar. 15, 2024	KES-EM240684	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0 General Product Description	4
1.1 Test Voltage & Frequency	6
1.2 Variant Model Differences	6
1.3 Device Modifications	6
1.4 Equipment Under Test	6
1.5 System Configuration	6
1.6 Support Equipments	7
1.7 External I/O Cabling	8
1.8 EUT Operating Mode(s)	9
1.9 Configuration	10
1.10 Remarks When Standards Applied	11
1.11 Calibration Details of Equipment Used for Measurement	11
1.12 Test Facility	11
1.13 Laboratory Accreditations and Listings	12
2.0 Test Regulations	13
2.1 Conducted Emissions at Mains Power Ports	14
2.2 Conducted Emissions at Telecommunication Ports	15
2.3 Impulse Noise (click)	16
2.4 Radiated Electric Field Emissions(Below 1 GHz)	17
2.5 Radiated Electric Field Emissions(Above 1 GHz)	18
2.6 Harmonic Current Emissions	19
2.7 Voltage Fluctuations and Flicker	20
3.0 Criteria for Compliance	21
3.1 Electrostatic Discharge	22
3.2 Radio-frequency Electromagnetic Field	26
3.3 Fast Transients	29
3.4 Surges	32
3.5 Conducted Disturbance	36
3.6 Power Frequency Magnetic Field Immunity	38
APPENDIX A – TEST DATA	41
Conducted Emissions at Mains Power Ports	41
Conducted Emissions at Telecommunication Ports	43
Impulse Noise (click)	45
Radiated Electric Field Emissions(Below 1 GHz)	46
Radiated Electric Field Emissions(Above 1 GHz)	48
Harmonic Current Emissions and Voltage Fluctuations and Flicker	50
Test Setup Photos and Configuration	53
Conducted Emissions at Mains Power Ports	53
Conducted Emissions at Telecommunication Ports	54
Impulse Noise (click)	56
Radiated Electric Field Emissions(Below 1 GHz)	57
Radiated Electric Field Emissions(Above 1 GHz)	59
Harmonic Current Emissions and Voltage Fluctuations and Flicker	61
Electrostatic Discharge	62
Radio-frequency Electromagnetic Field	63
Fast Transients	65
Surges	66
Conducted Disturbance	67
Power Frequency Magnetic Field Immunity	68
EUT Photographs	72
EUT Internal Layout Photographs	73



1.0 General Product Description

Main Specifications of EUT are:

	XNF-9013RV
Video	
Imaging Device	1/2.3" 12MP CMOS
Resolution	Original view(1:1): 3008x3008~480x480, Double panorama(2:1): 3584x1792~640x320, Single panorama(4:1): 3584x896~640x160, Quad view: 3584x2688~640x480, Q1/Q2/Q3/Q4(4:3): 1792x1344~640x480
Max. Framerate	H.265/H.264: Original view-Max.30fps/25fps@3008x3008(60Hz/50Hz), Double panorama- Max.30fps/25fps@3584x1792(60Hz/50Hz) Single panorama-Max.30fps/25fps@3584x896(60Hz/50Hz) MJPEG: Max.30fps/25fps@1080x1080(60Hz/50Hz)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.39 Lux (F2.2, 1/30sec), BW : 0Lux(IR LED on)
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for Installation USB: Micro USB Type B, 1280x720 for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	1.08mm fixed focal
Max. Aperture Ratio	F2.2
Angular Field of View	H: 187° / V: 187° / D: 187°
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Lens Type	None
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	Lens Rotation
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	extremeWDR (120dB)
Digital Image Stabilization	None
Defog	None
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Max Gain / Manual
White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor
LDC	None
Digital PTZ	Support(Preset, Group)
Video Rotation	Flip, Mirror
Serial Interface	None
Alarm I/O	2 configurable I/O ports
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output



Report No. : KES-EM240684

	PTZ Preset Handover Audio playback
Audio In	Selectable(mic in/line in/built-in mic) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max. output level: 1Vrms
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature detect range	None
Temperature accuracy	None
Temperature detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Quality level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)
Security	HTTPS(SSL) Login Authentication Digest Login Authentication
	IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA)
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 2slot 1TB(512GBx2)
Memory	4096MB RAM, 512MB Flash
Environmental & Electrical	
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 95% RH
Certification	IP66, IK10, NEMA4X
Input Voltage	PoE(IEEE802.3af, Class3), PoE+, 12VDC
Mechanical	
Color / Material	White / Aluminum, Hard-coated dome bubble
RAL Code	RAL9003
Product dimensions / weight	Ø160x72mm(6.23x2.84")
Conduit hole	None
Hanging mount(Dome)	SBP-167HMMW
Skin cover(Dome)	SBC-160BF
Weather cap(Dome)	None
Power module	None
Backbox	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	34.9m(114.49ft)
Observe (63PPM/ 19PPF)	13.9m(45.60ft)
Recognize (125PPM/ 38PPF)	7.0m(22.96ft)
Identify (250PPM/ 76PPF)	3.5m(11.48ft)

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of this test report can be found on the verification page of our website (www.kes.co.kr).



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

- ☒ AC 230 V, 50 Hz (DC Adapter Input Power)
- ☒ AC 230 V, 50 Hz (PoE Adapter Input Power)

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNF-9013RV	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-



1.6 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Laptop	LG15U590	-	LG	-
Laptop Adapter	A13-040N3A	-	CHICONY POWER TECHNOLOGY (Chongqing) CO., LTD.	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Micro SD Card	-	-	SanDisk	16 GB
AC/DC Adapter	FSP060-DIBAN2	-	Zhonghan Electronics Shenzhen Co. Ltd.	-
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Smartphone	SM-J500	R59M503KX0M	Samsung Electronics	-
Headset	K550	-	Britz®	-



1.7 External I/O Cabling

■ AC/DC Adapter

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	2 Pin	AC/DC Adapter	2 Pin	1.5	U
	RJ-45 (LAN)	Laptop	RJ-45 (LAN)	3.5	U
	Audio OUT	Headset	Audio IN	1.8	U
	Audio IN		Audio OUT	1.8	U
	Alarm OUT	Alarm	Alarm IN	3.5	U
	Alarm IN	Button Alarm	Alarm OUT	3.5	U
PoE Adapter Notebook Laptop	Micro SD Card SLOT	Micro SD Card	Micro SD Card SLOT	-	-
	3.5 mm	Smartphone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

■ PoE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.5	U
	Audio OUT	Headset	Audio IN	1.8	U
	Audio IN		Audio OUT	1.8	U
	Alarm OUT	Alarm	Alarm IN	3.5	U
	Alarm IN	Button Alarm	Alarm OUT	3.5	U
	Micro SD Card SLOT	Micro SD Card	Micro SD Card SLOT	-	-
PoE Adapter	RJ-45 (LAN)	Laptop	RJ-45 (LAN)	2.0	U
Laptop	3.5 mm	Smartphone	3.5 mm	1.0	U
	DC Jack	Laptop Adapter	DC Jack	1.5	U

* Unshielded=U, Shielded=S



1.8 EUT Operating Mode(s)


Test mode	Normal operating
AC/DC Adapter, PoE	<ol style="list-style-type: none">1. Check the camera video output on the Notebook.2. Check if the network status is operating normally during PING TEST.3. Check the output of the 1 kHz tone output from the smartphone and the microphone input from the headset.4. Press the alarm button to check the normal operation of the button alarm.5. After testing, I checked the files stored on Micro SD card.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd




1.9 Configuration

■ AC/DC Adapter

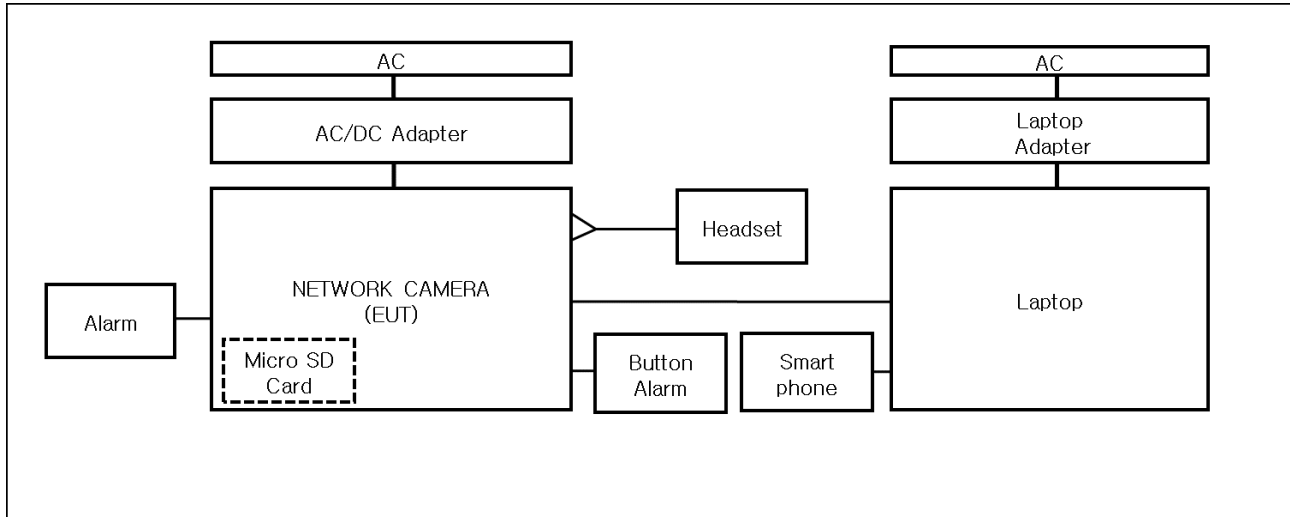


■ PoE

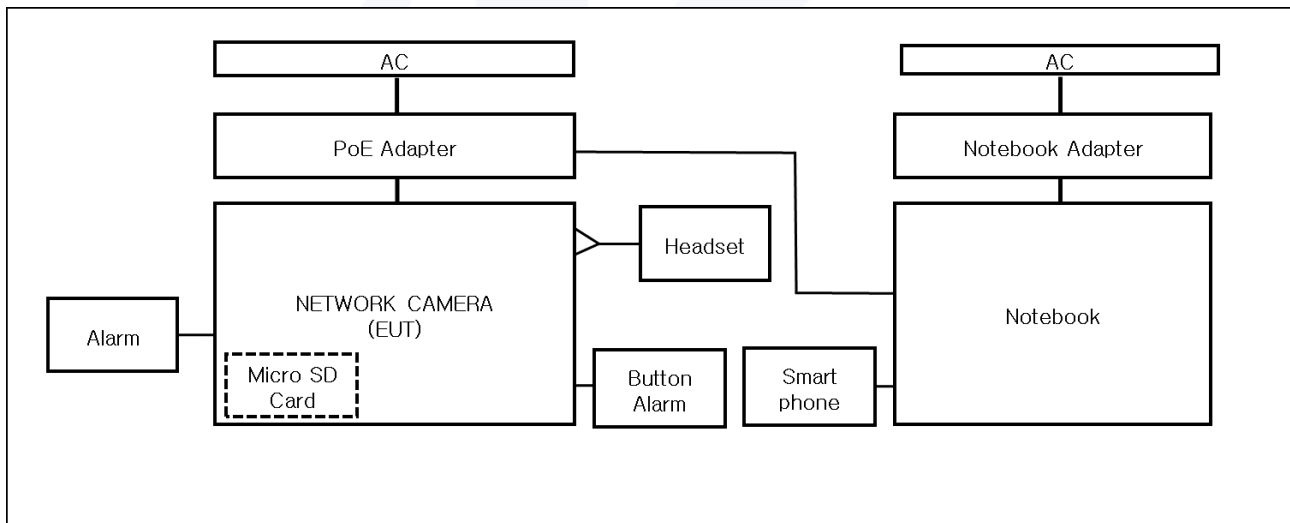



1.10 Remarks When Standards Applied

- The LAN port is regarded as a wired communication network port and power-related ports are not tested.
- The VIDEO port is not tested because it is for administrator use.
- Port photo for administrator

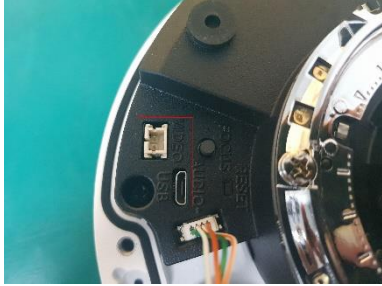

1.11 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.12 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

**1.13 Laboratory Accreditations and Listings**

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 50121-4:2016/A1:2019

☒ EN IEC 61000-3-2:2019

☒ EN 61000-3-3:2013/A2:2021

☒ **EMC – Regulations 2016**

☒ EN 50121-4:2016/A1:2019

☒ EN IEC 61000-3-2:2019

☒ EN 61000-3-3:2013/A2:2021



2.1 Conducted Emissions at Mains Power Ports

Test Date

Mar. 04, 2024

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	Nov 08, 2024
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	Nov 08, 2024
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	Nov 08, 2024
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	Nov 08, 2024

Test Conditions

Temperature: (22,5 ± 0,1) °C

Relative Humidity: (46,1 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Mar. 04, 2024

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	Nov 08, 2024
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	Nov 08, 2024
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	Nov 08, 2024
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	Nov 08, 2024
<input checked="" type="checkbox"/>	8-WIRE ISN CAT3,5	ENY81	R & S	100174	Nov 09, 2024
<input type="checkbox"/>	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	Nov 09, 2024

Test Conditions

Temperature: (22,5 ± 0,1) °C
Relative Humidity: (46,1 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Impulse Noise (click)

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	EMI Test S/W	CLICK METER SOFTWARE CMS FOR DDA55	AFJ	4.19	-
<input type="checkbox"/>	CLICK ANALYZER	DDA55+	AFJ INSTRUMENTS	14042211198	Feb 13, 2025
<input type="checkbox"/>	LISN	ENV216	R & S	101786	Feb 10, 2025
<input type="checkbox"/>	LISN	ENV216	R & S	101137	Feb 10, 2025

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

RemarksImpulse Noise(click) does not occurrence.



2.4 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Mar 04, 2024

Test Location☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	Feb 13, 2025
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	Nov 08, 2024
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	Nov 17, 2024
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	Feb 13, 2025

Test Conditions

Temperature: (22,8 ± 0,1) °C
Relative Humidity: (46,1 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.5 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Mar 04, 2024

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	Feb 13, 2025
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	Nov 03, 2024
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	HP	3008A00538	May 31, 2024
<input checked="" type="checkbox"/>	ATTENUATOR	8491B	HP	23094	Feb 13, 2025

Test Conditions

Temperature: (23,1 ± 0,1) °C
Relative Humidity: (45,9 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.



2.6 Harmonic Current Emissions

Test Date

Mar 04, 2024

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	Mar 27, 2024
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (22,7 ± 0,1) °C

Relative Humidity: (45,1 ± 0,1) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.

- The LAN port is regarded as a wired communication network port and power-related ports are not tested.



2.7 Voltage Fluctuations and Flicker

Test Date

Mar 04, 2024

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	Mar 27, 2024
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (22,7 ± 0,6) °C
Relative Humidity: (45,1 ± 0,6) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The LAN port is regarded as a wired communication network port and power-related ports are not tested.



3.0 Criteria for Compliance

Criteria for compliance was based on the following guidelines:

General performance criteria

The general principles (performance criteria) for the evaluation of the immunity test results are the following.

Performance criteria A

The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criteria B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criteria C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Mar 04, 2024

Test Location

EMS-ESD: Electro wave Shieldroom#7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	Jan 30, 2025
<input checked="" type="checkbox"/>	HCP	-	KES	-	-
<input checked="" type="checkbox"/>	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (22,1 ± 0,1) °C
Relative Humidity: (45,8 ± 0,1) % R.H.
Atmospheric Pressure: (100,7 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: ■ 10 at all locations for Air discharge
■ 10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	<input type="checkbox"/> 2 kV	<input checked="" type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV
	<input type="checkbox"/> 4 kV	<input checked="" type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV
	<input checked="" type="checkbox"/> 6 kV	<input type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV
	<input type="checkbox"/> 8 kV	<input checked="" type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV
	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV

Notes: HCP: Horizontal Coupling Plane

VCP: Vertical Coupling Plane



Required Performance Criteria: ☒ B



Location of Discharge:





■ AC/DC Adapter

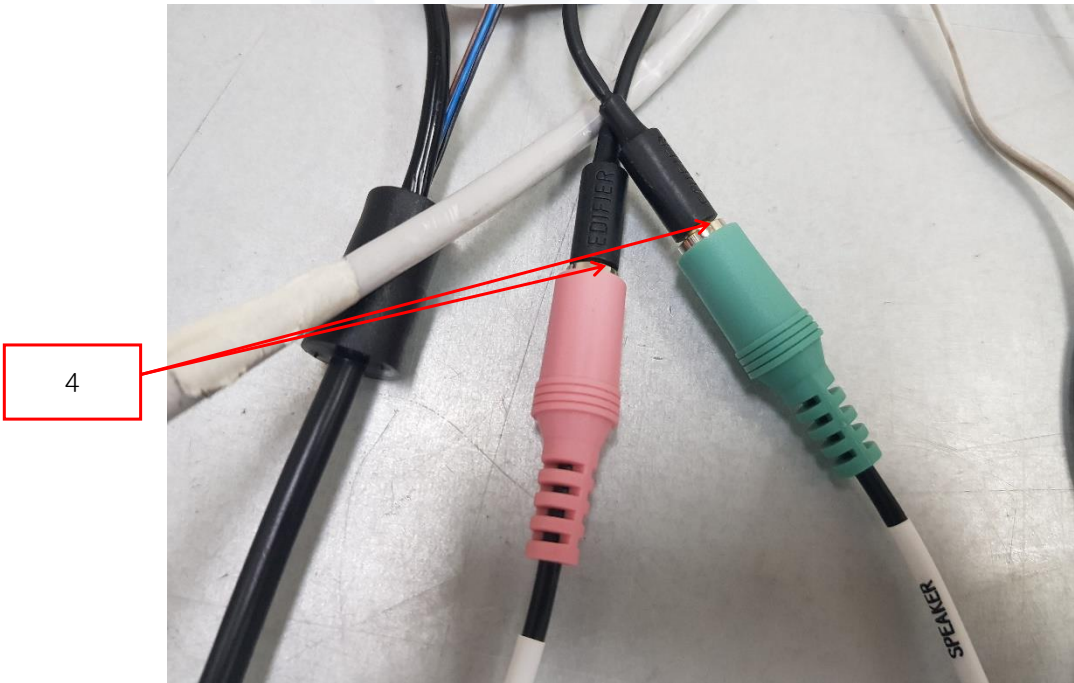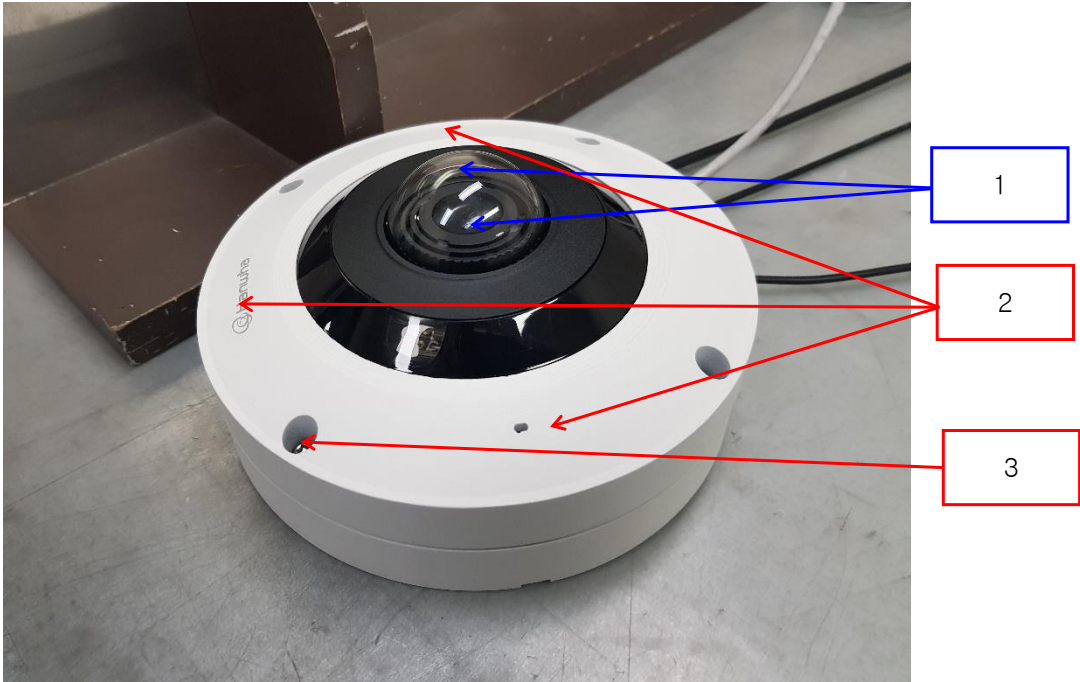



■ PoE

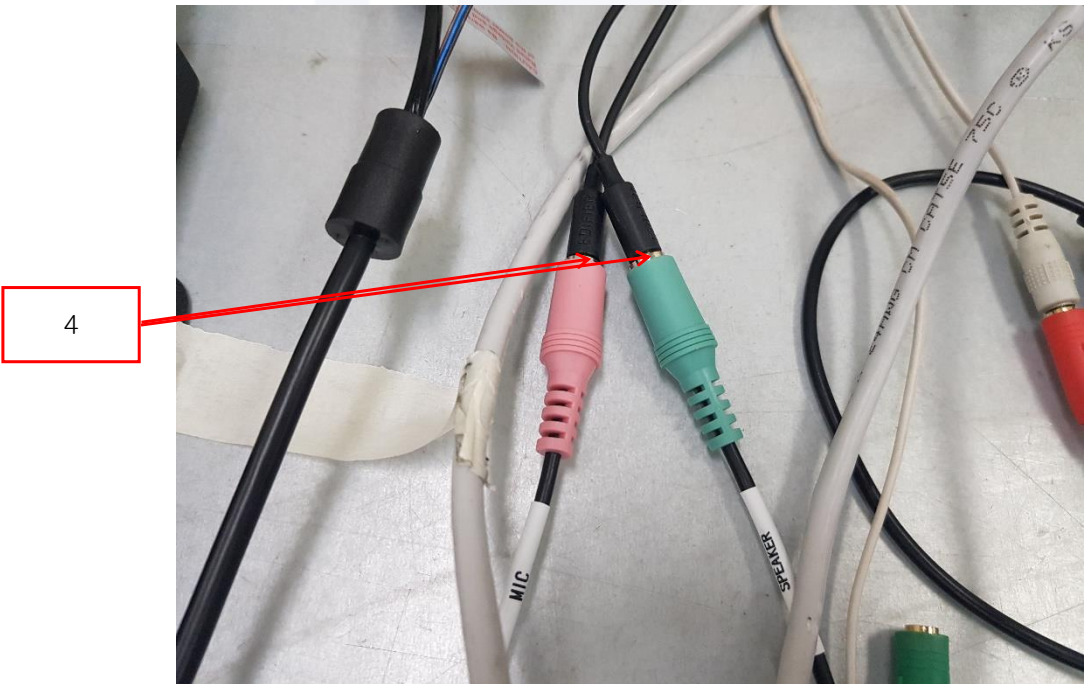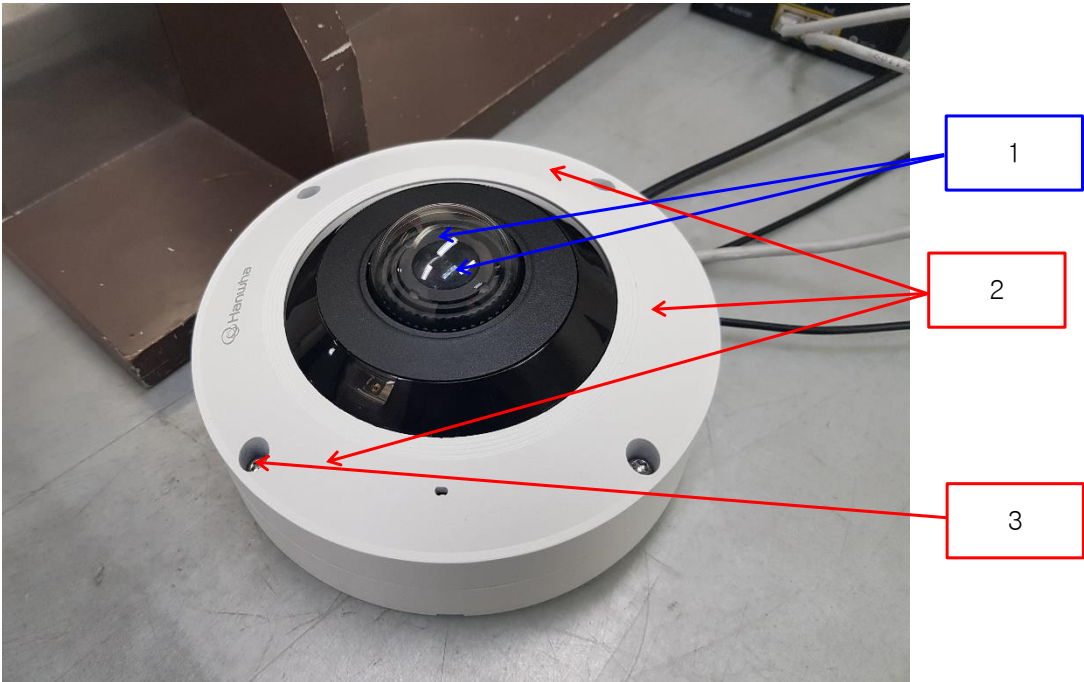

**Test Data**

■ AC/DC Adapter
Indirect Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	HCP Contact	Contact Discharge	B	A
2	VCP Contact	Contact Discharge	B	A

Direct Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	Camera Lens	Air Discharge	B	A
2	Enclosure	Contact Discharge	B	A
3	Screw	Contact Discharge	B	A
4	Around the port	Contact Discharge	B	A

■ PoE
Indirect Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	HCP Contact	Contact Discharge	B	A
2	VCP Contact	Contact Discharge	B	A

Direct Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	Camera Lens	Air Discharge	B	A
2	Enclosure	Contact Discharge	B	A
3	Screw	Contact Discharge	B	A
4	Around the port	Contact Discharge	B	A

Note: "Blank" = Not performed

Results:

A – No degradation of function
B – Distortion/Error of function (self-recoverable)
C – Loss of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

Any degradations of performance was not observed during in the test.



3.2 Radio-frequency Electromagnetic Field

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Mar 05, 2024

Test LocationEMS-RS: ☐ SEMI ANECHOIC CHAMBER #3 ☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	Jul 31, 2024
<input checked="" type="checkbox"/>	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
<input checked="" type="checkbox"/>	POWER METER	E4419B	Agilent	GB40203000	Feb 13, 2025
<input checked="" type="checkbox"/>	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	Feb 13, 2025
<input checked="" type="checkbox"/>	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	Feb 13, 2025
<input checked="" type="checkbox"/>	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 D	SCHWARZBECK	9128D038	-
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	Nov 03, 2024

Test Conditions

Temperature: (22,6 ± 0,6) °C
Relative Humidity: (46,4 ± 0,6) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa



Test Specifications

Antenna Polarization: Horizontal & Vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Frequency Range: ☒ 80 MHz to 800 MHz [10V/m]
[Field Strength] ☒ 800 MHz to 1 GHz [20 V/m]
☒ 1,4 GHz to 2,0 GHz [10 V/m]
☒ 2,0 GHz to 2,7 GHz [5 V/m]
☒ 5,1 GHz to 6,0 GHz [3 V/m]

Modulation: ☒ 80 % AM, 1 kHz sine wave

Frequency Step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ A

**Test Data**

■ AC/DC Adapter

Side Exposed	Performance Criteria	Results	
		Horizontal	Vertical
Front	A	A	A
Right	A	A	A
Back	A	A	A
Left	A	A	A

■ PoE

Side Exposed	Performance Criteria	Results	
		Horizontal	Vertical
Front	A	A	A
Right	A	A	A
Back	A	A	A
Left	A	A	A

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

Any degradations of performance was not observed during in the test.



3.3 Fast Transients

Reference Standard

EN 61000-4-4:2012

Test Date

Mar 06, 2024

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.8	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
<input checked="" type="checkbox"/>	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	Nov 10, 2024

Test Conditions

Temperature: (22,5 ± 0,1) °C
Relative Humidity: (46,1 ± 0,1) % R.H.
Atmospheric Pressure: (100,4 ± 0,0) kPa

Test Specifications

Pulse Amplitude & Polarity: ☒ ± 2.0 kV ☐ ± 4.0 kV
(Power Lines)

Pulse Amplitude & Polarity: ☒ ± 2.0 kV ☐ ± 4.0 kV
(Signal Lines)

Pulse Amplitude & Polarity: ☐ ± 1.0 kV
(Earth Lines)

Burst Period: ☒ 300 ms

Repetition Rate: ☒ 5 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ A

**Test Data**☒ AC/DC Adapter☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
L	A	A	A
N	A	A	A
L - N	A	A	A

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
RJ-45(LAN)	A	A	A
Alarm IN	A	A	A
Alarm OUT	A	A	A

☐ Earth ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
-	A	-	-

**■ PoE**☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
-	A	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
RJ-45(PoE)	A	A	A
Alarm IN	A	A	A
Alarm OUT	A	A	A

☐ Earth ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
-	A	-	-

Note: “Blank” = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.4 Surges

Reference Standard

EN 61000-4-5:2014+A1:2017

Test Date

Mar 06, 2024

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.8	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
<input checked="" type="checkbox"/>	CDN	CNV 508N1	EM TEST	P1610176296	Nov 10, 2024

Test Conditions

Temperature: (22,5 ± 0,6) °C
Relative Humidity: (46,1 ± 0,6) % R.H.
Atmospheric Pressure: (100,4 ± 0,0) kPa

**Test Specifications****AC Power Lines**

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :
Common Mode
☐ (2,0) kV
Differential Mode
☒ (1,0) kVNumber of Surges: ☒ 5 surges per angleAngle: ☒ 0°, 90°, 180°, 270° (input AC power port)Polarity: ☒ Positive & NegativeRepetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.Required Performance Criteria: ☒ B**DC Power Lines**Source Impedance: 42 ohm
Surge Amplitude: Common Mode
☐ (2,0) kV
Differential Mode
☐ (1,0) kVNumber of Surges: ☐ 5 SurgesPolarity: ☐ Positive & NegativeRepetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.Required Performance Criteria: ☐ B**Signal Lines**Source Impedance: 42 ohm
Surge Amplitude: Common Mode
☐ (2,0) kV
Differential Mode
☒ (1,0) kVNumber of Surges: ☒ 5 SurgesPolarity: ☒ Positive & NegativeRepetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.Required Performance Criteria: ☒ B

**Test Data**☒ AC/DC Adapter☒ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
L - N	B	A	A

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Signal Lines☒ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(LAN)	B	A	A

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

☒ PoE☐ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Signal Lines☒ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	B	A	A

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Mar 06, 2024

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	icd.control	EM TEST	5.3.12	-
<input checked="" type="checkbox"/>	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	Nov 08, 2024
<input checked="" type="checkbox"/>	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	Nov 08, 2024
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43694	Nov 08, 2024
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43697	Nov 08, 2024
<input checked="" type="checkbox"/>	CDN	CDN T800	TESEQ	42800	Nov 08, 2024
<input checked="" type="checkbox"/>	EM CLAMP	KEMZ 801A	TESEQ	44099	Nov 09, 2024

Test Conditions

Temperature: (22,3 ± 0,6) °C
Relative Humidity: (46,1 ± 0,6) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa

Test Specifications

Frequency Range: ☒ 150 kHz to 80 MHz
Voltage Level: ☒ 10 Vrms
Modulation: ☒ 80 % AM, 1 kHz sine wave
Frequency Step: ☒ 1 % step
Dwell Time: ☐ 1 s ☒ 3 s
Required Performance Criteria: ☒ A

**Test Data**

■ AC/DC Adapter

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
L - N	CDN	A	A

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
RJ-45(LAN)	CDN	A	A
Alarm IN	Clamp	A	A
Alarm OUT	Clamp	A	A

☐ Earth ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	Clamp	-	-

■ PoE

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	CDN	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
RJ-45(PoE)	CDN	A	A
Alarm IN	Clamp	A	A
Alarm OUT	Clamp	A	A

☐ Earth ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	Clamp	-	-

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.6 Power Frequency Magnetic Field Immunity

Reference Standard

EN 61000-4-8:2010

Test Date

Mar 06, 2024

Test Location

EMS-Magnetic: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.8	-
<input checked="" type="checkbox"/>	EMS Test S/W	NET.CONTROL	EM TEST	1.2.11	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
<input checked="" type="checkbox"/>	MAGNETIC FIELD COIL	MS 100N	EM TEST	P1536163691	Nov 10, 2024
<input checked="" type="checkbox"/>	CURRENT TRANSFORMER	MC 26100 (100 A 교정)	EM TEST	P1550168963	Feb 14, 2025
<input checked="" type="checkbox"/>	MULTIFUNCTION AC/DC POWER SOURCE	NETWAVE 7-400	EM TEST	P1614178393	Nov 08, 2024
<input checked="" type="checkbox"/>	MAGNETICFIELD COIL	INA 703	Teseq AG	3006	Feb 14, 2025

Test Conditions

Temperature: (22,5 ± 0,1) °C
Relative Humidity: (46,1 ± 0,1) % R.H.
Atmospheric Pressure: (100,4 ± 0,0) kPa



Test Specifications

Field Strength(Power Source): ☒ 100 A/m (ac)

☒ 300 A/m (dc)

Frequency (ac): ☒ 16.7 Hz ☒ 50 Hz ☐ 60 Hz

Frequency (dc): ☒ 0 Hz

Required Performance Criteria: ☒ A



**Test Data**☒ AC/DC Adapter☒ Immersion method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	A
Y - axis	A	A
Z - axis	A	A

☐ Proximity method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	-
Y - axis	A	-
Z - axis	A	-

☒ PoE☒ Immersion method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	A
Y - axis	A	A
Z - axis	A	A

☐ Proximity method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	-
Y - axis	A	-
Z - axis	A	-

Note: "blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC/DC Adapter

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: XNF-9013RV
Phase: AC/DC Adapter_L1
Mode:
Operator Name: KES

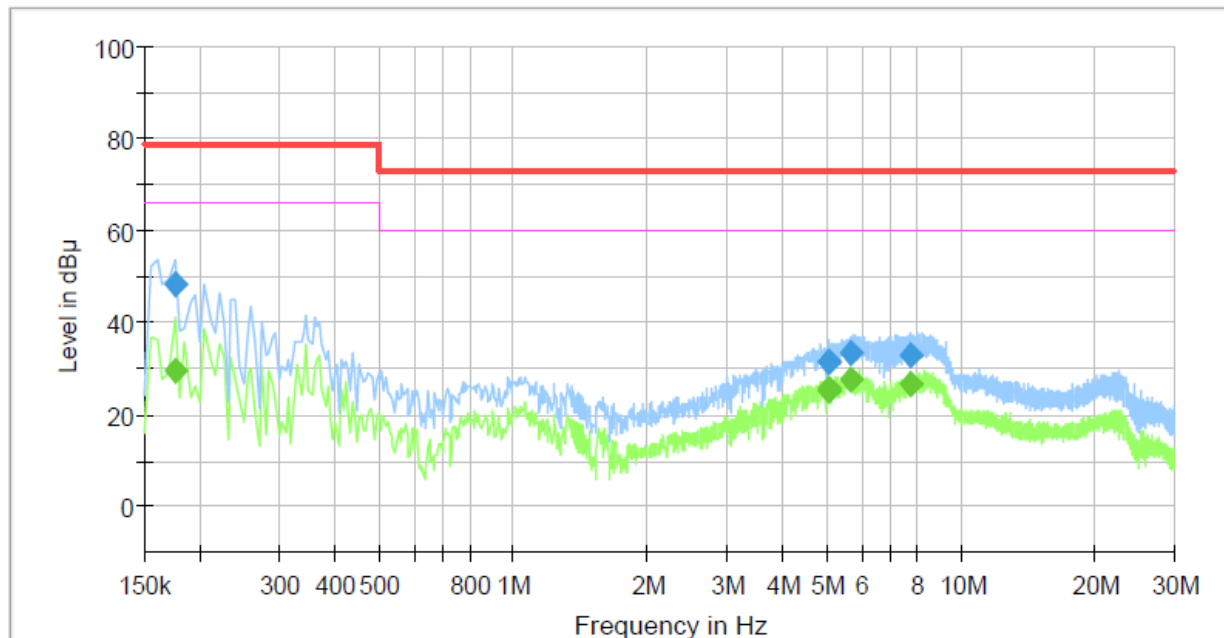

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.175000	---	29.57	66.00	36.43	1000.0	9.000	L1	19.4
0.175000	48.27	---	79.00	30.73	1000.0	9.000	L1	19.4
5.065000	---	25.41	60.00	34.59	1000.0	9.000	L1	19.7
5.065000	31.27	---	73.00	41.73	1000.0	9.000	L1	19.7
5.100000	---	25.55	60.00	34.45	1000.0	9.000	L1	19.8
5.100000	31.45	---	73.00	41.55	1000.0	9.000	L1	19.8
5.715000	---	27.41	60.00	32.59	1000.0	9.000	L1	19.8
5.715000	33.40	---	73.00	39.60	1000.0	9.000	L1	19.8
7.750000	---	26.76	60.00	33.24	1000.0	9.000	L1	19.9
7.750000	32.72	---	73.00	40.28	1000.0	9.000	L1	19.9



[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNF-9013RV
Phase: AC/DC Adapter_N
Mode:
Operator Name: KES

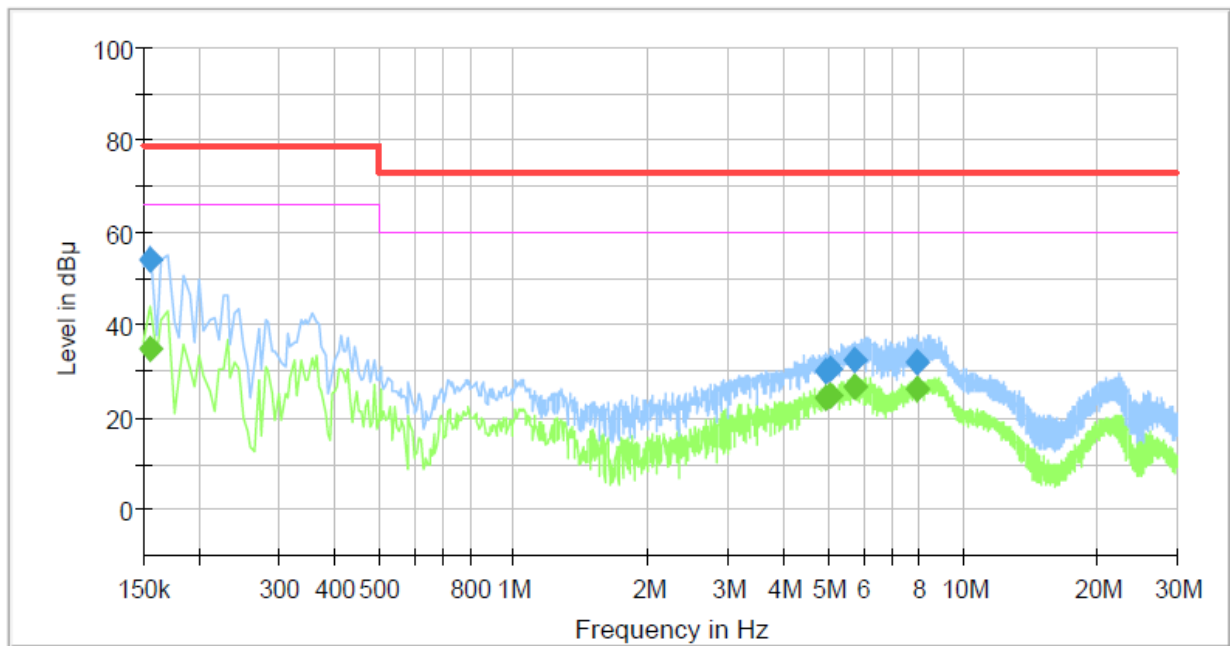

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	34.78	66.00	31.22	1000.0	9.000	N	19.3
0.155000	54.07	---	79.00	24.93	1000.0	9.000	N	19.3
4.960000	---	24.45	60.00	35.55	1000.0	9.000	N	19.7
4.960000	29.92	---	73.00	43.08	1000.0	9.000	N	19.7
5.100000	---	24.69	60.00	35.31	1000.0	9.000	N	19.8
5.100000	30.33	---	73.00	42.67	1000.0	9.000	N	19.8
5.770000	---	26.47	60.00	33.53	1000.0	9.000	N	19.8
5.770000	32.55	---	73.00	40.45	1000.0	9.000	N	19.8
7.935000	---	26.36	60.00	33.64	1000.0	9.000	N	19.9
7.935000	32.19	---	73.00	40.81	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak[dBμV] / CAverage [dBμV] = Reading Value[dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


**Conducted Emissions at Telecommunication Ports**

■ AC/DC Adapter

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNF-9013RV
Mode : AC/DC Adapter_TEL 100 Mbps
Speed :
Operator Name: KES

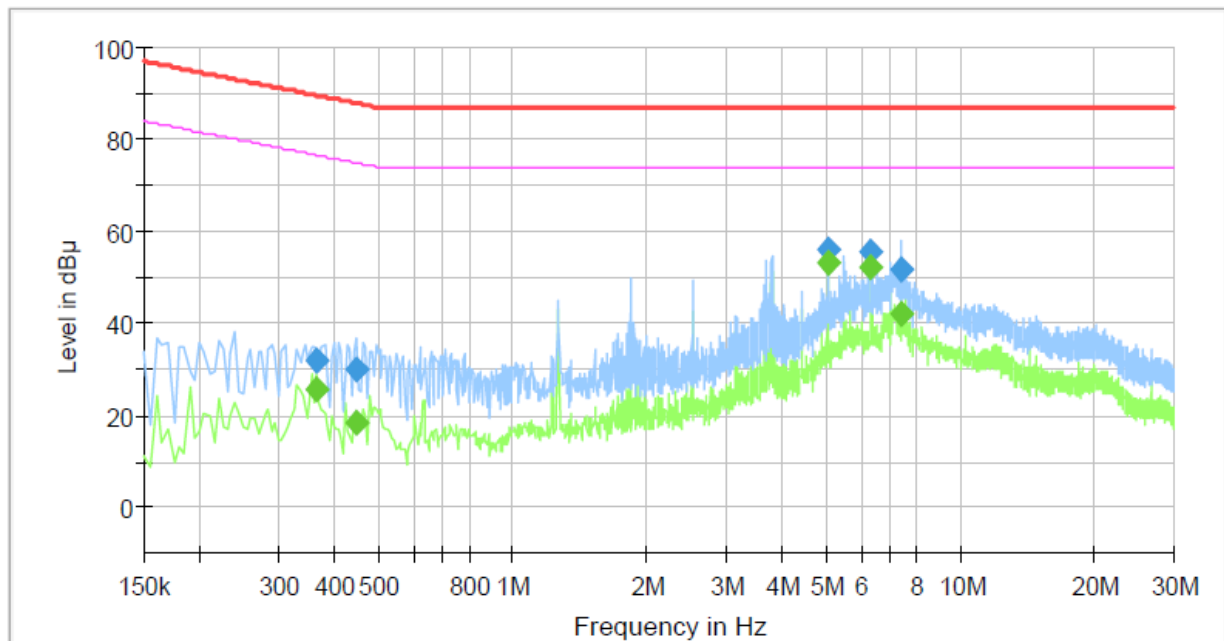**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.365000	---	25.53	76.61	51.08	1000.0	9.000	Single Line	19.4
0.365000	32.17	---	89.61	57.44	1000.0	9.000	Single Line	19.4
0.450000	---	18.32	74.88	56.56	1000.0	9.000	Single Line	19.4
0.450000	29.92	---	87.88	57.96	1000.0	9.000	Single Line	19.4
5.060000	---	53.35	74.00	20.65	1000.0	9.000	Single Line	19.4
5.060000	55.89	---	87.00	31.11	1000.0	9.000	Single Line	19.4
6.325000	---	52.25	74.00	21.75	1000.0	9.000	Single Line	19.5
6.325000	55.62	---	87.00	31.38	1000.0	9.000	Single Line	19.5
7.365000	---	41.87	74.00	32.13	1000.0	9.000	Single Line	19.5
7.365000	51.77	---	87.00	35.23	1000.0	9.000	Single Line	19.5




■ PoE

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNF-9013RV
Mode : PoE_TEL 100 Mbps
Speed :
Operator Name: KES

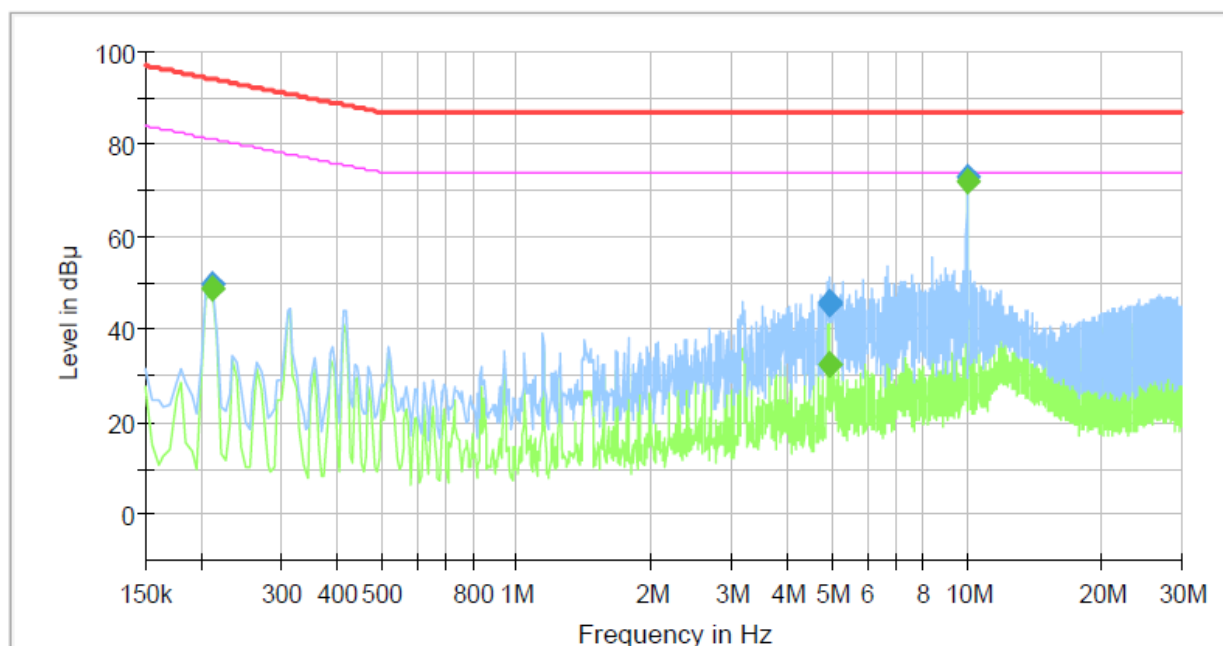**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.210000	---	48.99	81.21	32.22	1000.0	9.000	Single Line	19.6
0.210000	49.67	---	94.21	44.54	1000.0	9.000	Single Line	19.6
4.940000	---	32.51	74.00	41.49	1000.0	9.000	Single Line	19.4
4.940000	46.03	---	87.00	40.97	1000.0	9.000	Single Line	19.4
4.945000	---	32.35	74.00	41.65	1000.0	9.000	Single Line	19.4
4.945000	45.46	---	87.00	41.54	1000.0	9.000	Single Line	19.4
10.000000	---	72.04	74.00	1.96	1000.0	9.000	Single Line	19.6
10.000000	72.79	---	87.00	14.21	1000.0	9.000	Single Line	19.6

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))




Report No. : KES-EM240684

Page 45 / 80

Impulse Noise (click)


N/A

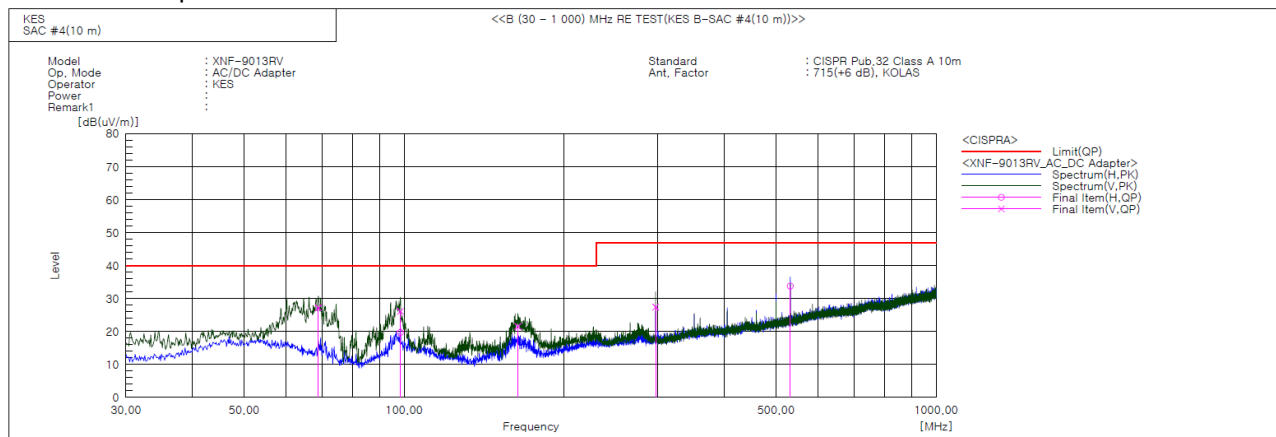**Radiated Electric Field Emissions(Below 1 GHz)****■ AC/DC Adapter****Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	68.921	V	51.8	-24.6	27.2	40.0	12.8	112.0	283.0	
2	98.385	V	48.5	-22.4	26.1	40.0	13.9	111.0	159.0	
3	98.389	H	42.1	-22.4	19.7	40.0	20.3	396.0	117.0	
4	163.618	V	46.1	-24.6	21.5	40.0	18.5	141.0	136.0	
5	296.993	V	45.0	-17.6	27.4	47.0	19.6	100.0	199.0	
6	532.096	H	44.1	-10.3	33.8	47.0	13.2	399.0	176.0	



■ PoE

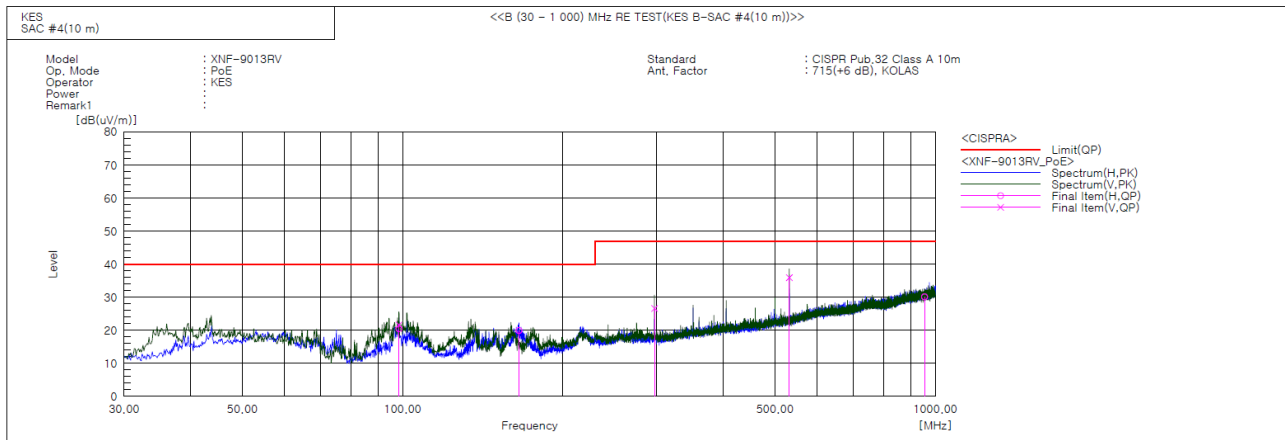

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		QP [dB(μV)]	[dB(1/m)]	QP [dB(μV/m)]	QP [dB(μV/m)]	QP [dB]	[cm]	[deg]	
1	98.385	V	44.0	-22.4	21.6	40.0	18.4	115.0	285.0	
2	98.399	H	42.8	-22.4	20.4	40.0	19.6	396.0	90.0	
3	165.315	H	44.4	-24.5	19.9	40.0	20.1	389.0	292.0	
4	296.993	V	44.2	-17.6	26.6	47.0	20.4	112.0	357.0	
5	531.975	V	46.2	-10.3	35.9	47.0	11.1	146.0	171.0	
6	954.531	H	32.8	-2.7	30.1	47.0	16.9	196.0	195.0	


◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

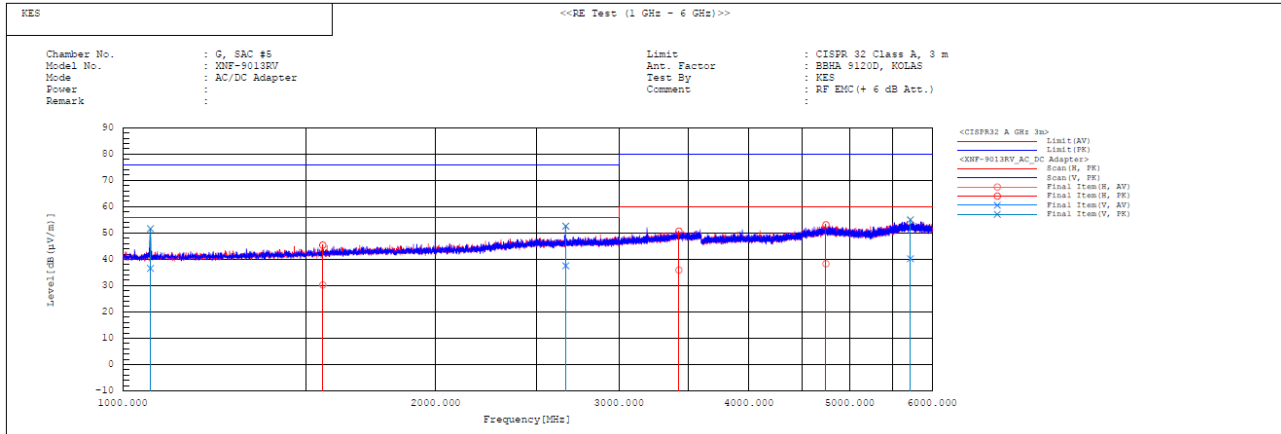**Radiated Electric Field Emissions(Above 1 GHz)****AC/DC Adapter****Final Result**

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1063.438	V	37.7	52.8	-1.2	36.5	51.6	56.0	76.0	19.5	24.4	100.0	0.8	
2	1557.145	H	28.9	44.1	1.3	30.2	45.4	56.0	76.0	25.8	30.6	100.0	307.1	
3	2666.697	V	31.9	47.0	5.6	37.5	52.6	56.0	76.0	18.5	23.4	100.0	233.5	
4	3426.458	H	28.7	43.5	7.2	35.9	50.7	60.0	80.0	24.1	29.3	100.0	188.7	
5	4742.687	H	26.7	41.5	11.6	38.3	53.1	60.0	80.0	21.7	26.9	100.0	325.2	
6	5719.369	V	26.2	41.0	14.0	40.2	55.0	60.0	80.0	19.8	25.0	100.0	10.2	



■ PoE

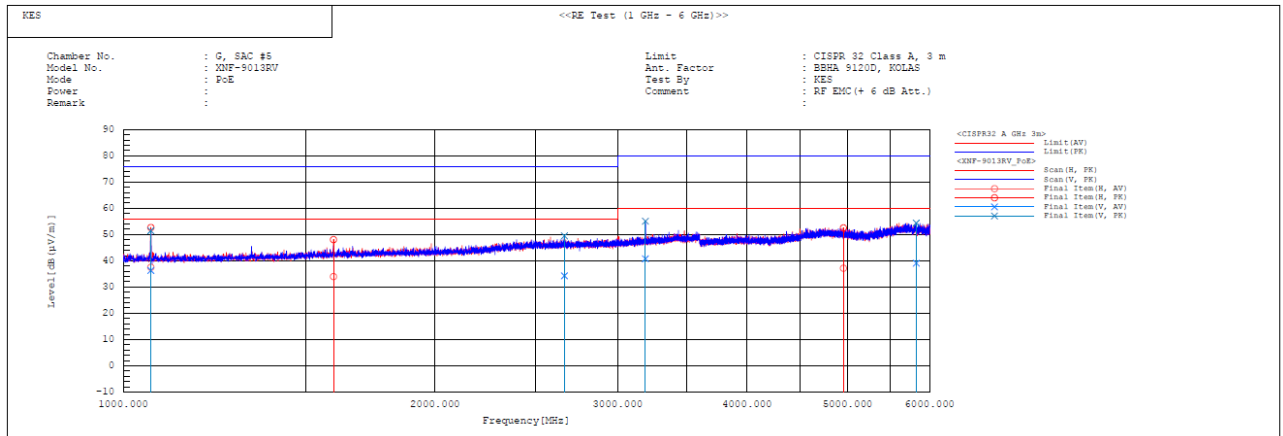

Final Result

No.	Frequency	Pol	Reading AV	Reading PK	c.f	Result AV	Result PK	Limit AV	Limit PK	Margin AV	Margin PK	Height	Angle	Remark
	[MHz]		[dB (μV)]	[dB (μV)]	[dB (l/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB]	[dB]	[cm]	[deg]	
1	1063.397	V	37.5	52.7	-1.2	36.3	51.5	56.0	76.0	19.7	24.5	100.0	217.3	
2	1063.366	H	38.7	53.9	-1.2	37.5	52.7	56.0	76.0	18.5	23.3	100.0	283.8	
3	1595.582	H	32.5	46.6	1.5	34.0	48.1	56.0	76.0	22.0	27.9	100.0	8.1	
4	2666.105	V	28.7	43.9	5.6	34.3	49.5	56.0	76.0	21.7	26.5	100.0	111.7	
5	3191.431	V	34.0	48.3	6.8	40.8	55.1	60.0	80.0	19.2	24.9	100.0	0.7	
6	4955.853	H	24.7	40.0	12.5	37.2	52.5	60.0	80.0	22.8	27.5	100.0	359.1	
7	5824.689	V	24.9	40.2	14.2	39.1	54.4	60.0	80.0	20.9	25.6	100.0	0.0	

◆ Calculation

Over Limit [dB] = (Read Level [dB μV] + Ant Factor [dB/m] + Cable Loss [dB] – Preamp Factor [dB]) – Limit Line [dB μV]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

**Harmonic Current Emissions and Voltage Fluctuations and Flicker**

■ AC/DC Adapter

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.052			
2	0.002	0.162	1.080	n/a
3	0.045	1.940	2.300	PASS
4	0.003	0.598	0.430	n/a
5	0.044	3.900	1.140	PASS
6	0.002	0.767	0.300	n/a
7	0.044	5.718	0.770	PASS
8	0.002	0.980	0.230	n/a
9	0.041	10.228	0.400	PASS
10	0.002	1.180	0.184	n/a
11	0.038	11.529	0.330	PASS
12	0.002	1.394	0.153	n/a
13	0.035	16.876	0.210	PASS
14	0.002	1.686	0.131	n/a
15	0.032	21.641	0.150	PASS
16	0.002	1.819	0.115	n/a
17	0.029	22.217	0.132	PASS
18	0.002	1.955	0.102	n/a
19	0.026	22.279	0.118	PASS
20	0.002	2.164	0.092	n/a
21	0.023	14.539	0.161	PASS
22	0.002	2.378	0.084	n/a
23	0.020	13.773	0.147	PASS
24	0.002	2.516	0.077	n/a
25	0.017	12.960	0.135	PASS
26	0.002	2.631	0.071	n/a
27	0.015	12.036	0.125	PASS
28	0.002	2.811	0.066	n/a
29	0.013	10.822	0.116	PASS
30	0.002	2.936	0.061	n/a
31	0.011	9.805	0.109	PASS
32	0.002	3.095	0.058	n/a
33	0.009	8.832	0.102	PASS
34	0.002	3.131	0.054	n/a
35	0.008	8.241	0.096	PASS
36	0.002	3.263	0.051	n/a
37	0.007	7.793	0.091	PASS
38	0.002	3.367	0.048	n/a
39	0.007	7.603	0.087	PASS
40	0.002	3.316	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.094			
2	0.002	0.151	1.620	n/a
3	0.087	2.511	3.450	PASS
4	0.004	0.580	0.645	n/a
5	0.084	4.884	1.710	PASS
6	0.003	0.743	0.450	n/a
7	0.078	6.796	1.155	PASS
8	0.003	0.974	0.345	n/a
9	0.071	11.863	0.600	PASS
10	0.003	1.078	0.276	n/a
11	0.063	12.800	0.495	PASS
12	0.003	1.277	0.230	n/a
13	0.055	17.432	0.315	PASS
14	0.003	1.532	0.197	n/a
15	0.047	20.724	0.225	PASS
16	0.003	1.688	0.173	n/a
17	0.039	19.409	0.199	PASS
18	0.003	1.861	0.153	n/a
19	0.031	17.647	0.178	PASS
20	0.003	2.059	0.138	n/a
21	0.026	15.949	0.161	PASS
22	0.003	2.285	0.125	n/a
23	0.021	14.433	0.147	PASS
24	0.003	2.361	0.115	n/a
25	0.019	13.839	0.135	PASS
26	0.003	2.560	0.106	n/a
27	0.017	13.907	0.125	PASS
28	0.003	2.598	0.099	n/a
29	0.017	14.651	0.116	PASS
30	0.003	2.762	0.092	n/a
31	0.016	15.094	0.109	PASS
32	0.002	2.769	0.086	n/a
33	0.016	15.366	0.102	PASS
34	0.002	2.851	0.081	n/a
35	0.014	14.960	0.096	PASS
36	0.002	2.904	0.077	n/a
37	0.013	14.265	0.091	PASS
38	0.002	2.943	0.073	n/a
39	0.011	13.040	0.087	PASS
40	0.002	2.994	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Voltage Fluctuations

Maximum Flicker results

■ AC/DC Adapter

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS





Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ AC/DC Adapter






Conducted Emissions at Telecommunication Ports

■ AC/DC Adapter





■ PoE

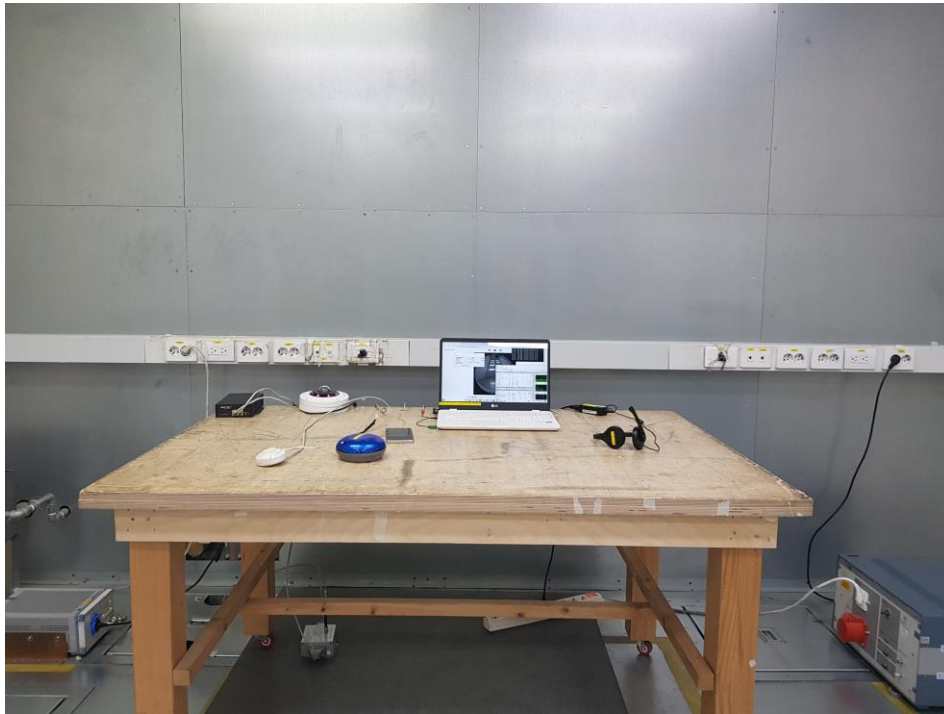



Impulse Noise (click)



N/A







Radiated Electric Field Emissions(Below 1 GHz)

■ AC/DC Adapter

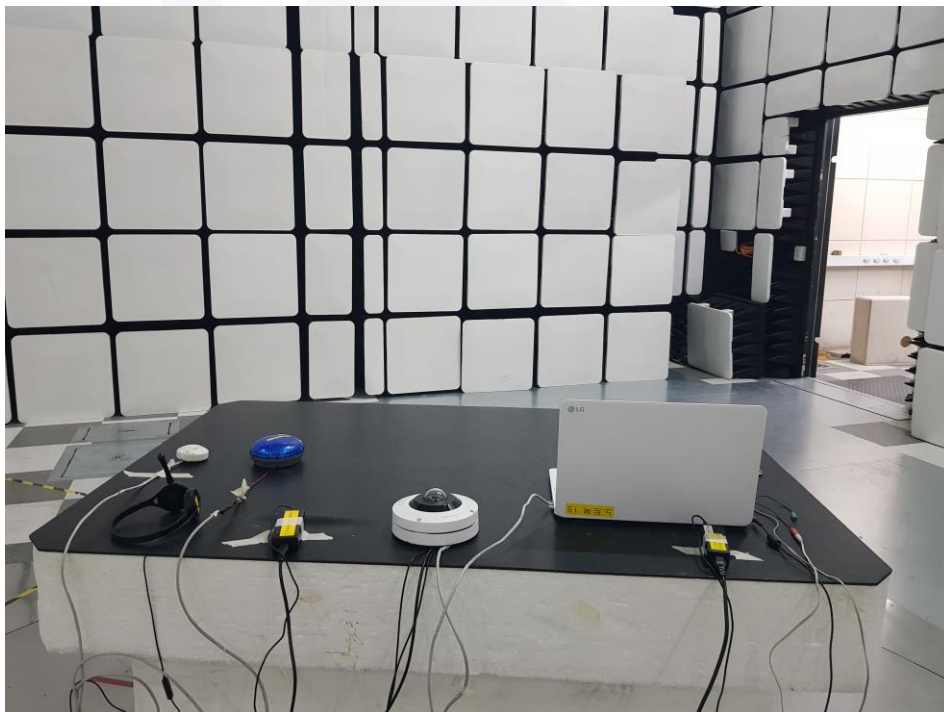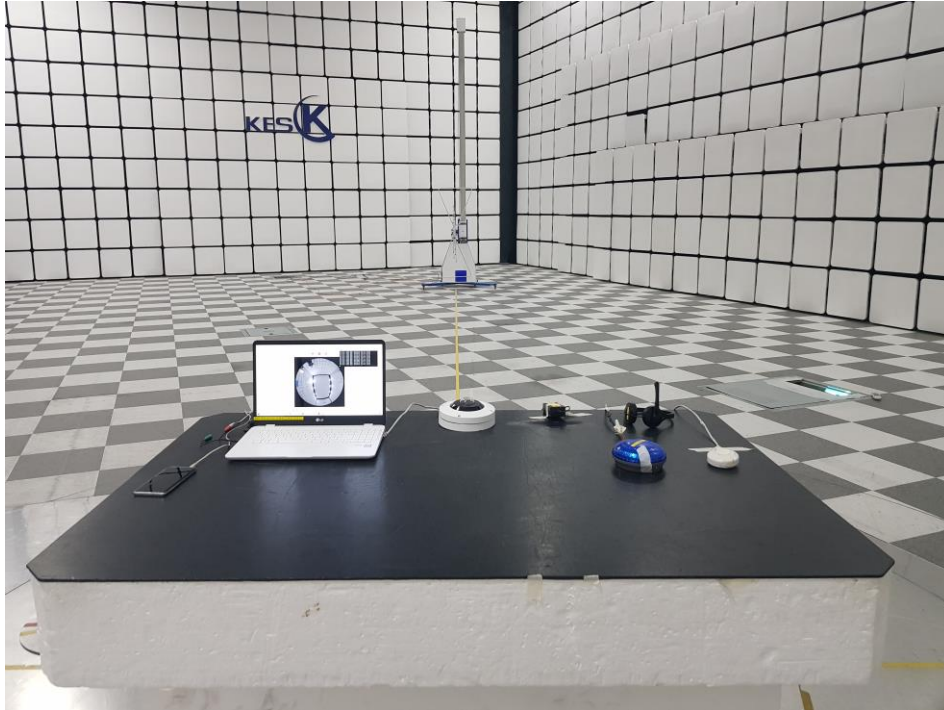





■ PoE

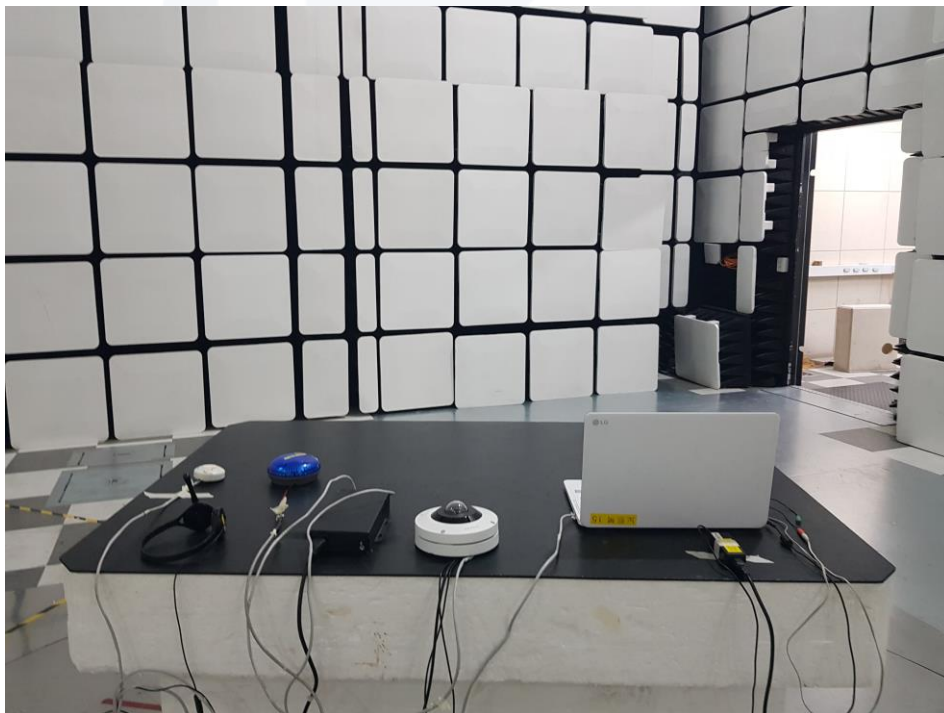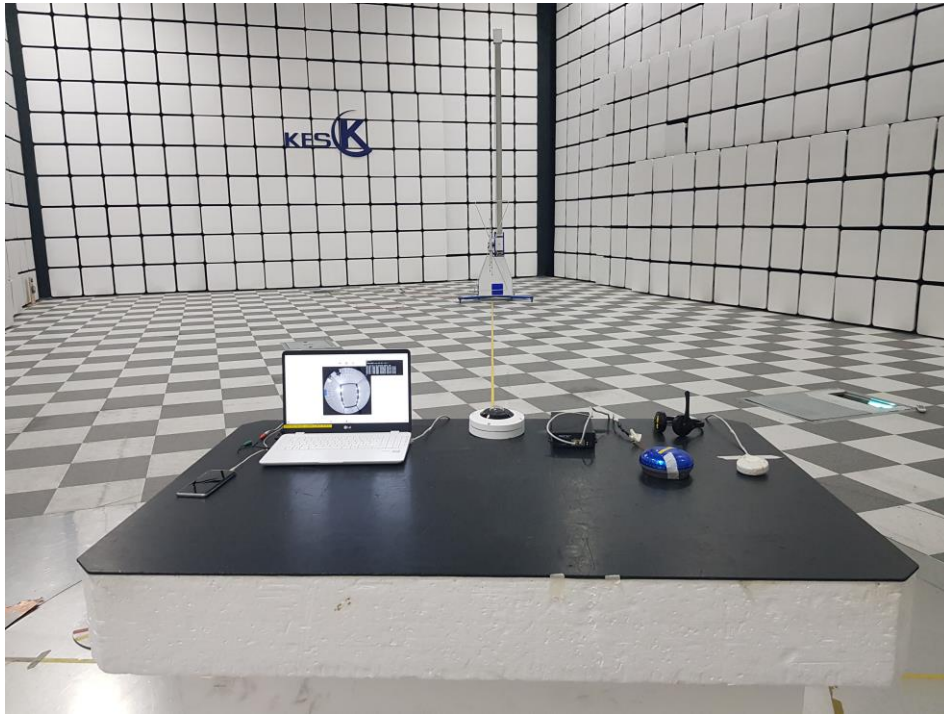





Radiated Electric Field Emissions(Above 1 GHz)

■ AC/DC Adapter

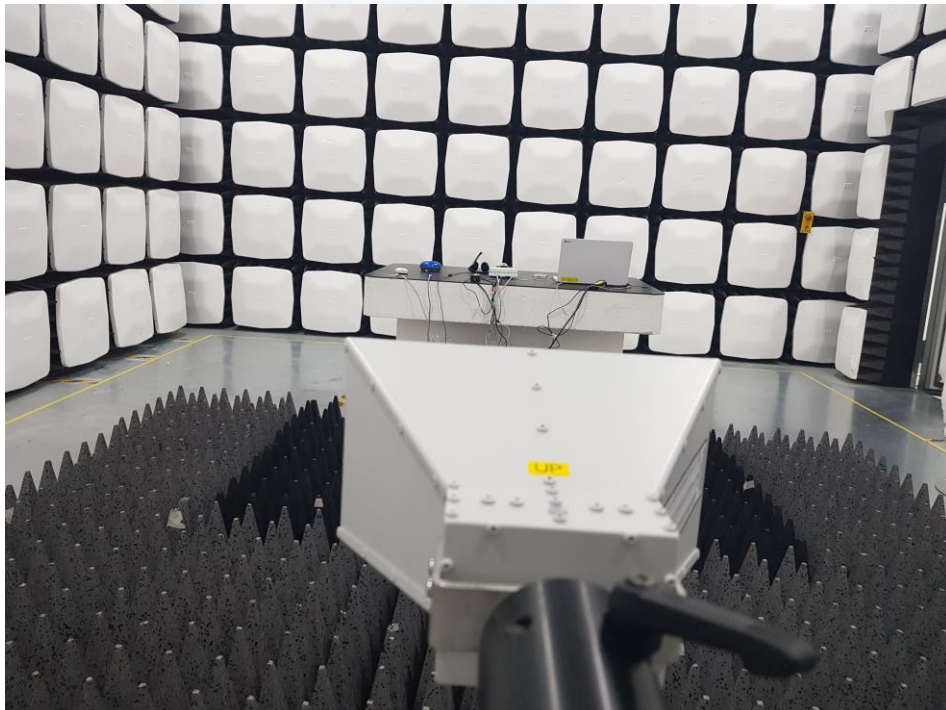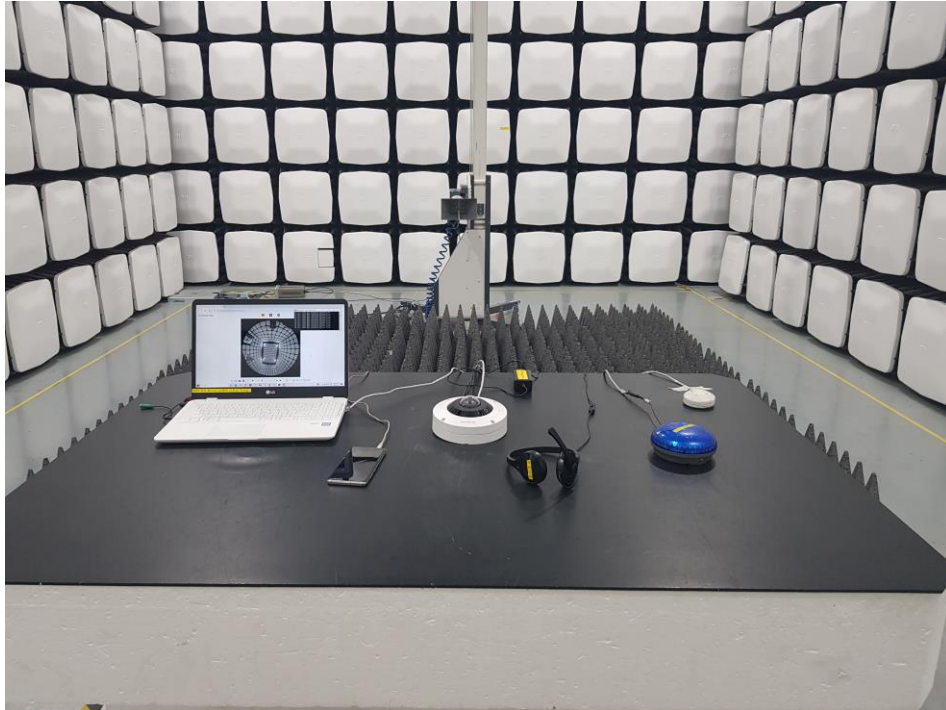



■ PoE

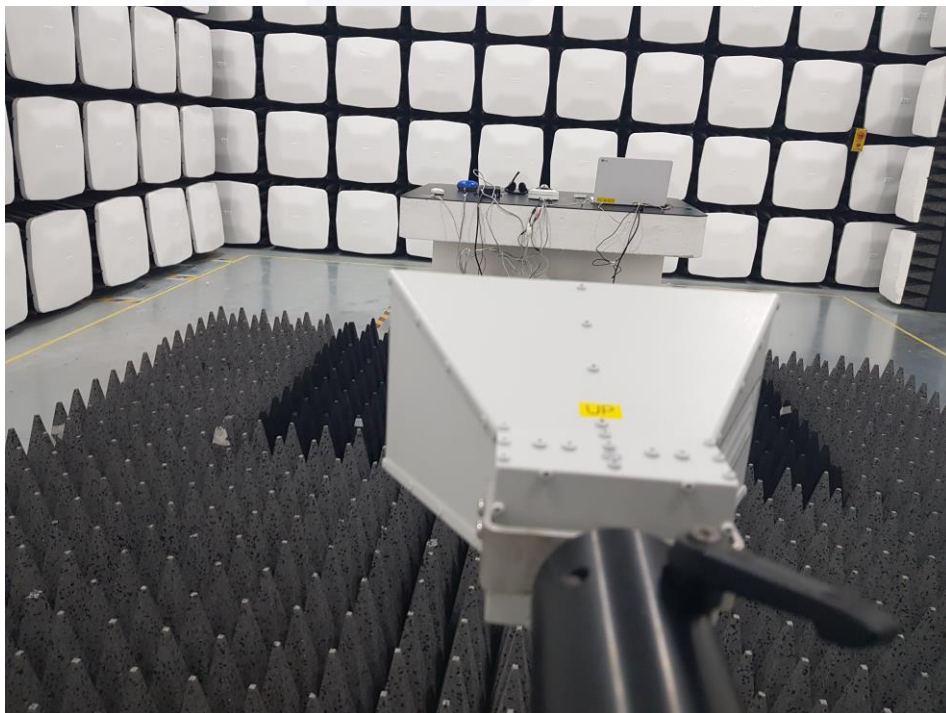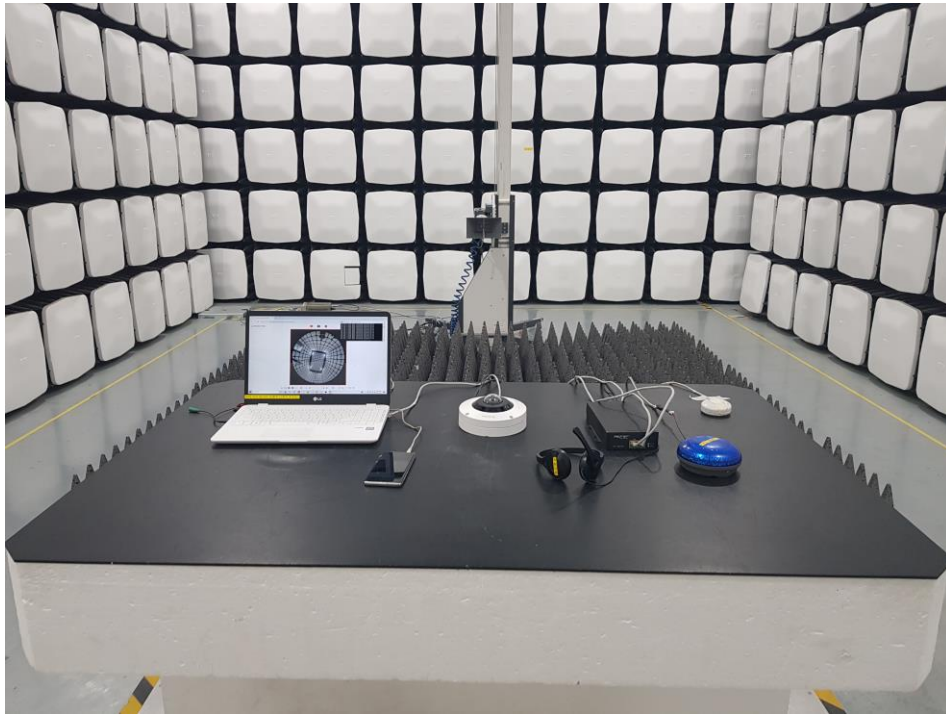



Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ AC/DC Adapter





Electrostatic Discharge

■ AC/DC Adapter



■ PoE







Radio-frequency Electromagnetic Field

■ AC/DC Adapter

- Below

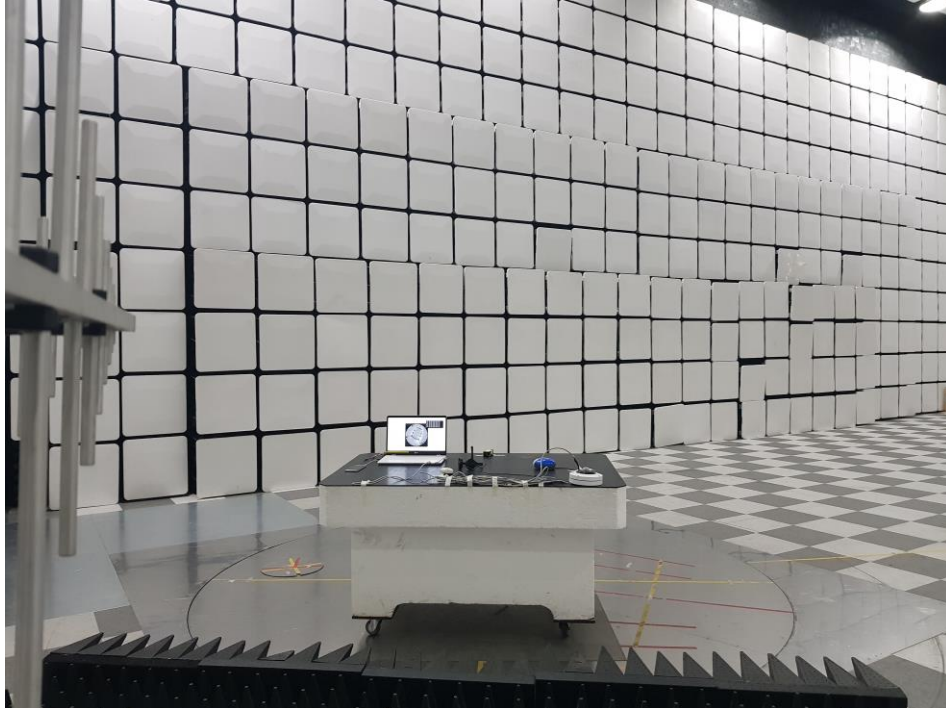


- Above

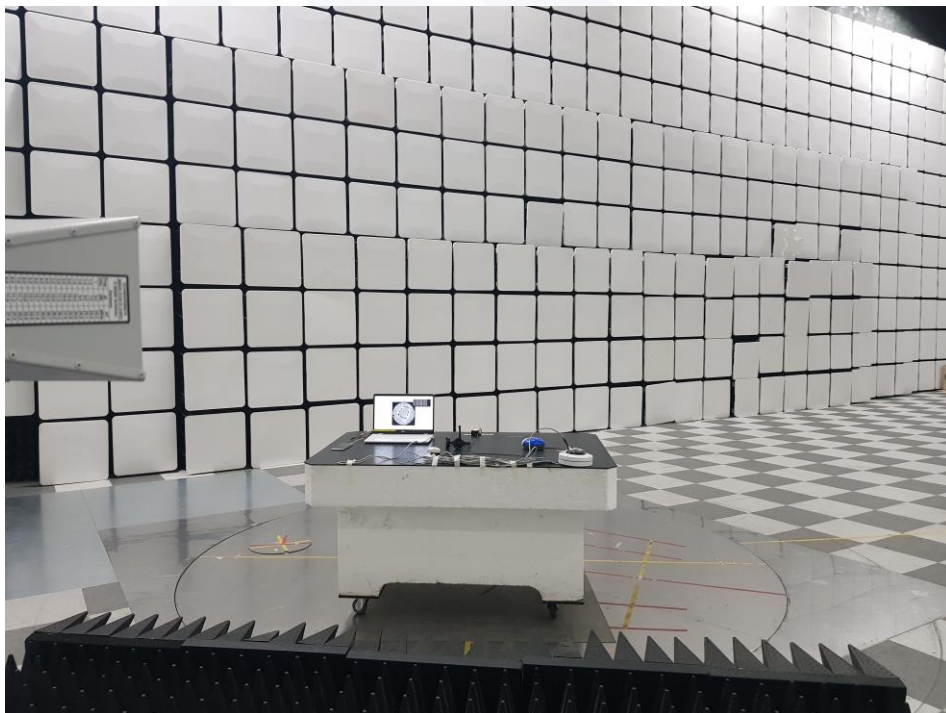




■ PoE
- Below

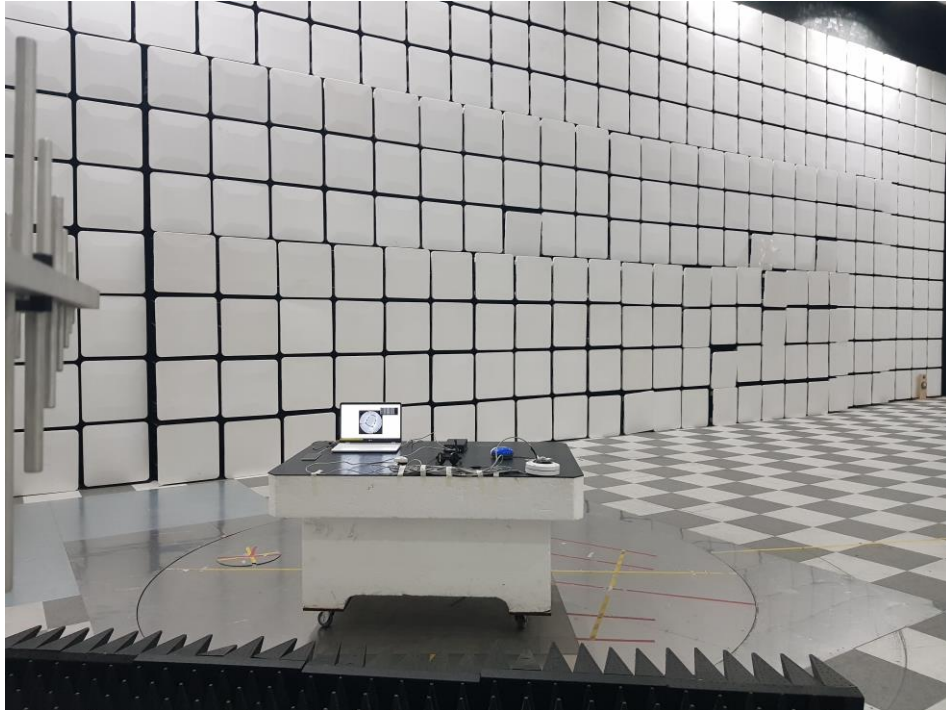


- Above

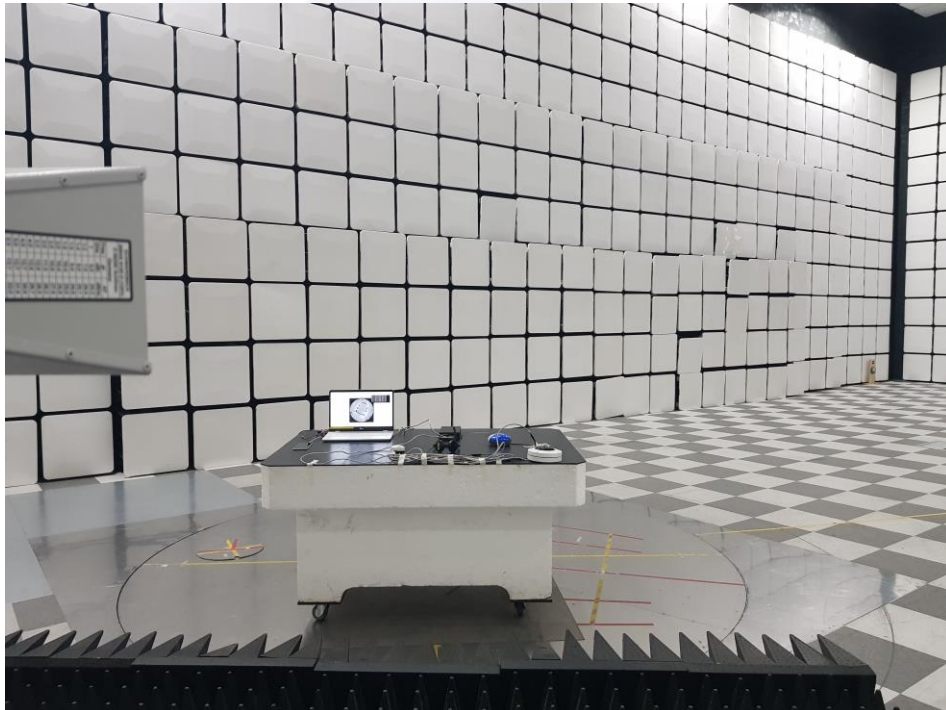




Fast Transients

■ AC/DC Adapter

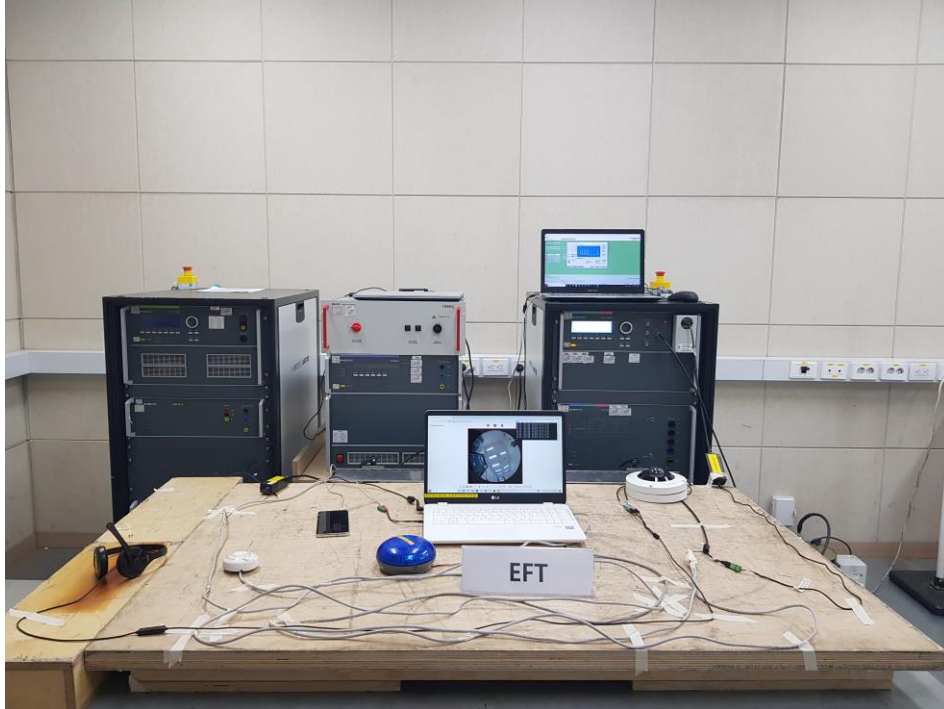

■ PoE

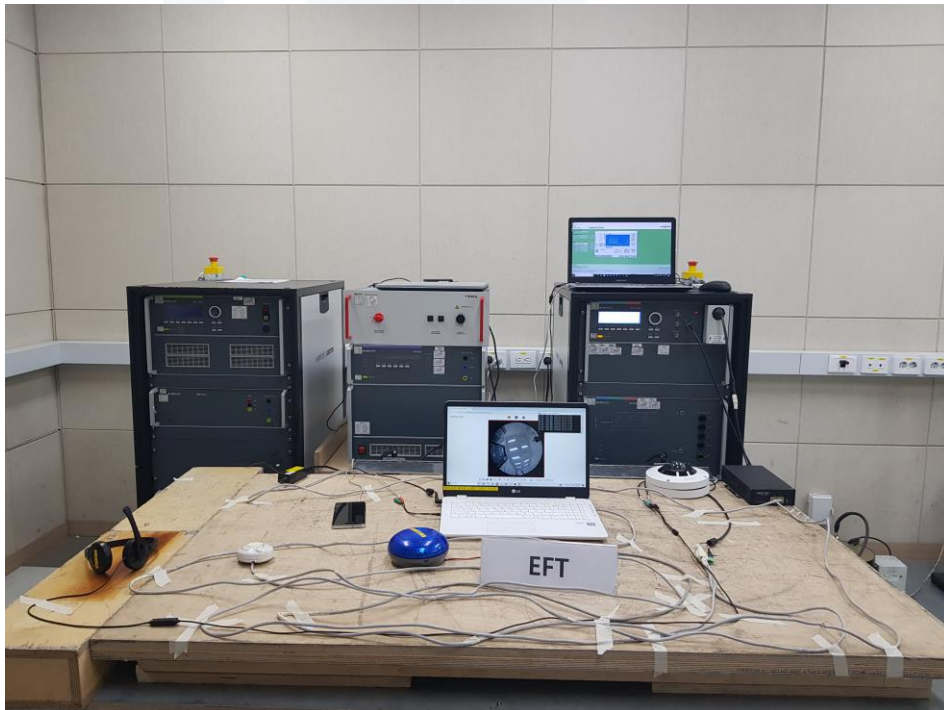



Surges

■ AC/DC Adapter



■ PoE






Conducted Disturbance

■ AC/DC Adapter



■ PoE

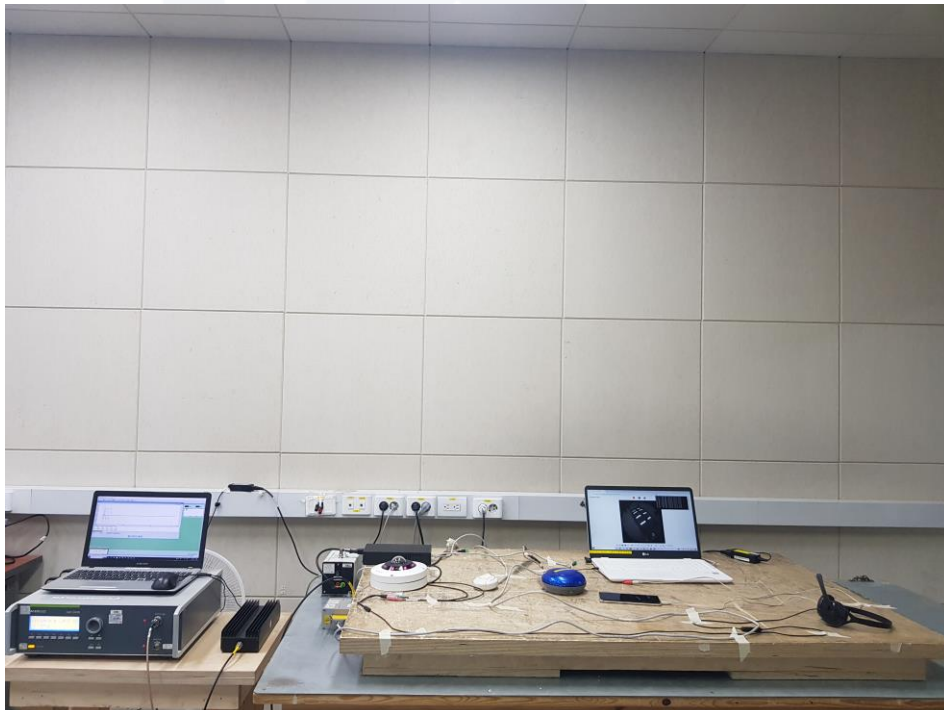



Power Frequency Magnetic Field Immunity

■ AC/DC Adapter

[16.7 Hz (AC), 100 A/m]



[50 Hz (AC), 100 A/m]





[0 Hz (DC), 300 A/m]





■ PoE

[16.7 Hz (AC), 100 A/m]




[50 Hz (AC), 100 A/m]





[0 Hz (DC), 300 A/m]

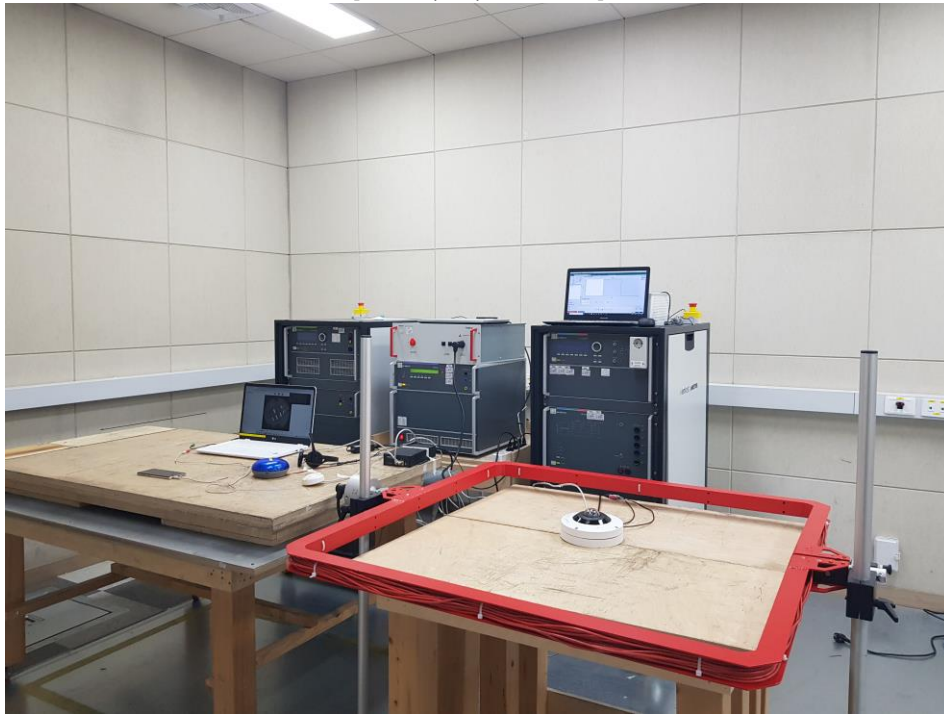



EUT Photographs

(Top)



(Bottom)






EUT Internal Layout Photographs






EUT Internal View – Main Board

(Top)

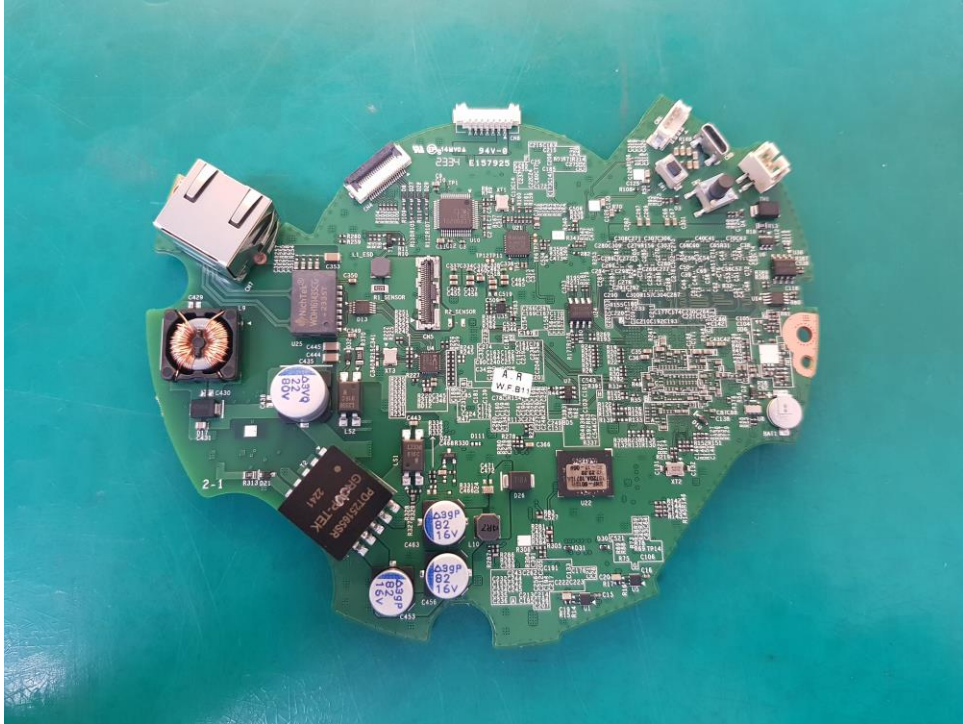

(Bottom)

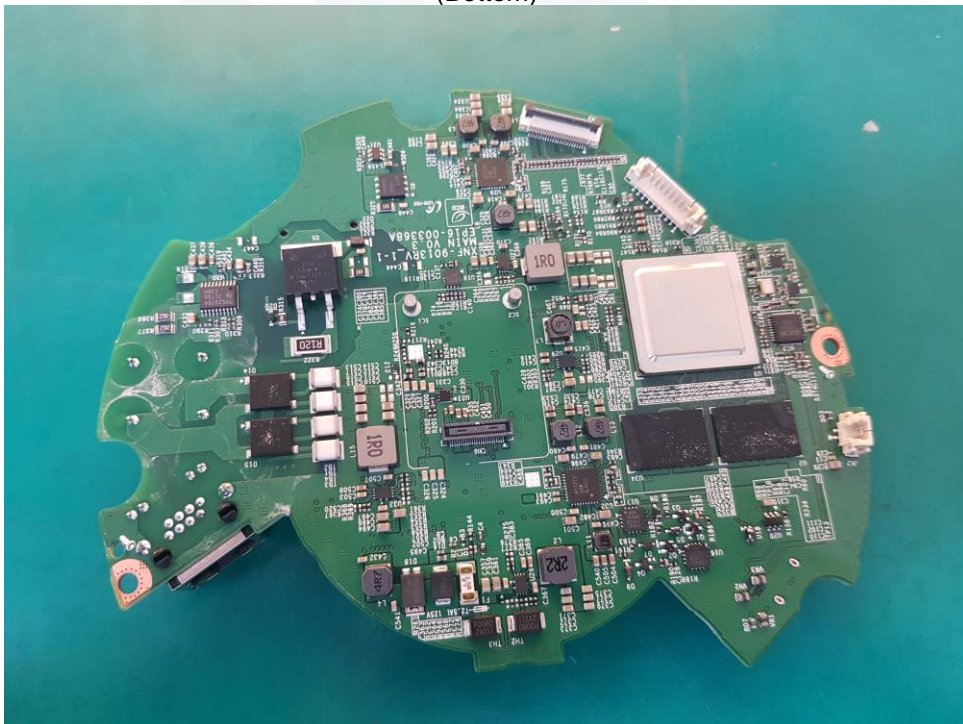




EUT Internal View – Sub Board 1

(Top)




(Bottom)

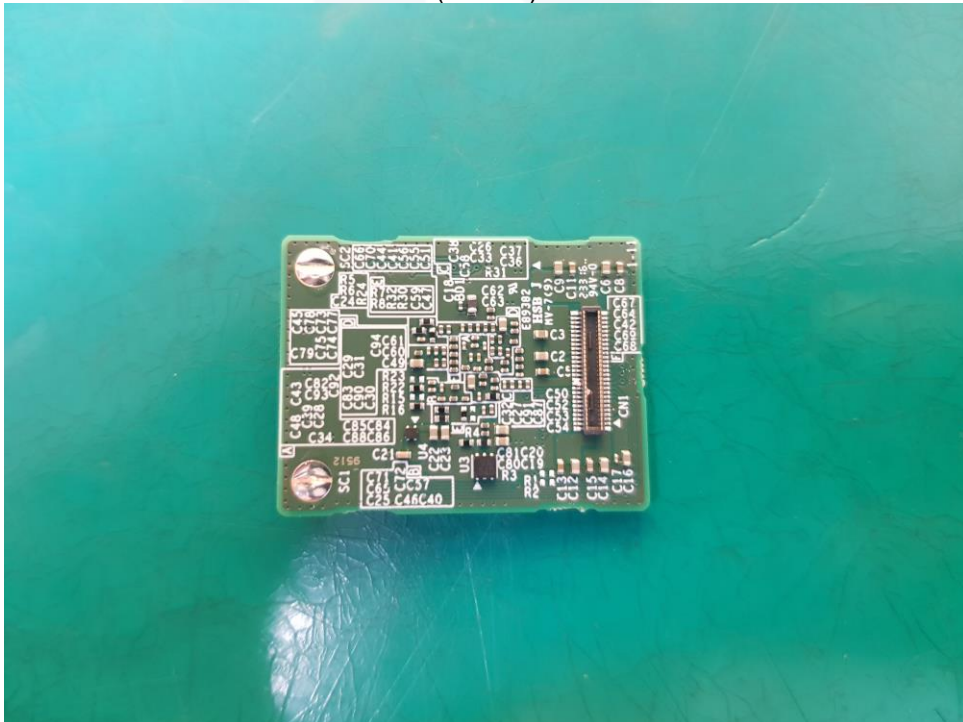




EUT Internal View – Sub Board 2

(Top)

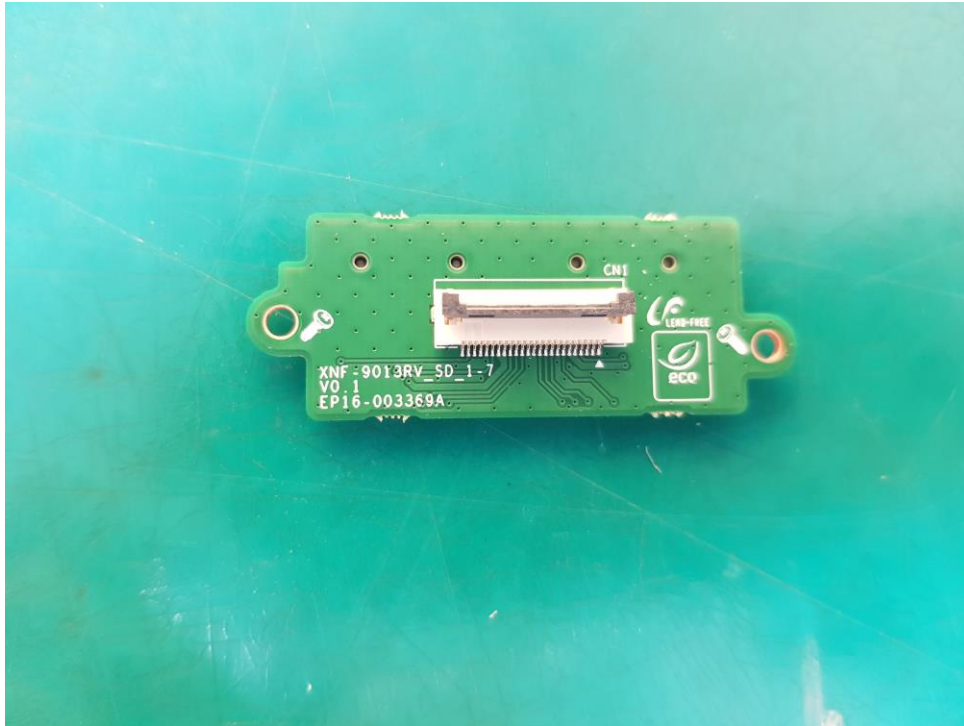

(Bottom)

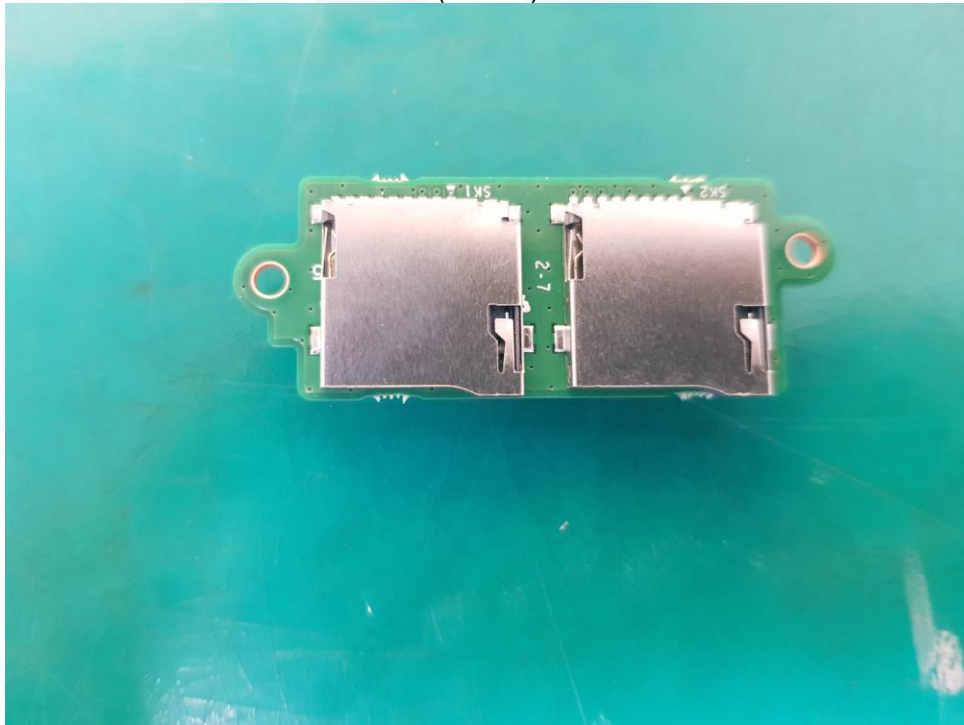



EUT Internal View – Sub Board 3

(Top)



(Bottom)





EUT Internal View – Camera Lens

(Top)




(Bottom)





EUT Internal View – Camera Lens Board

(Top)

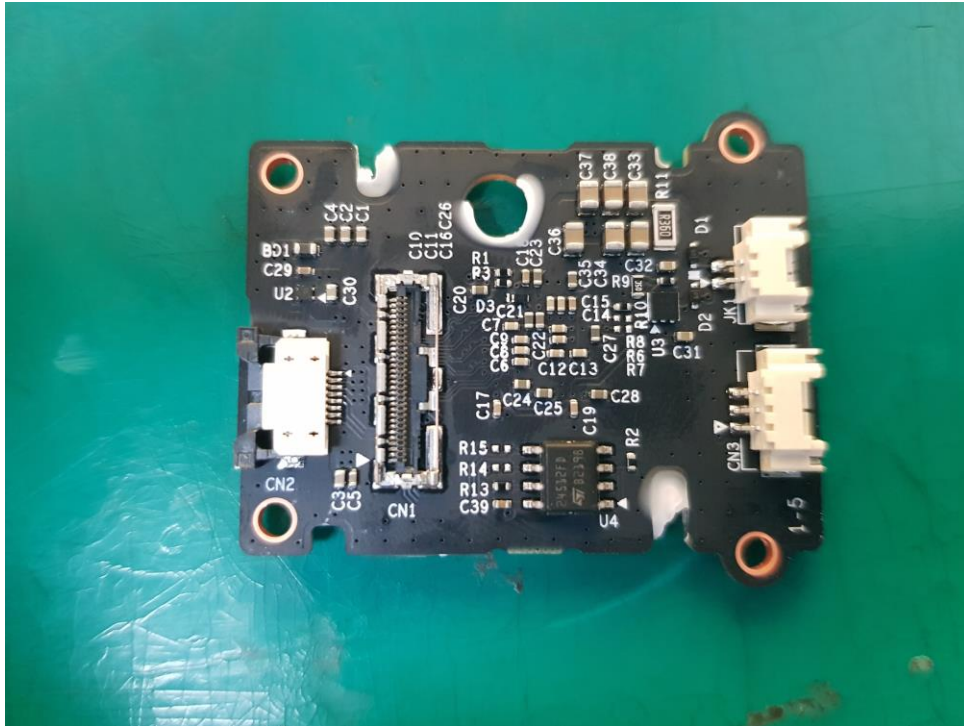


(Bottom)





Label and Location

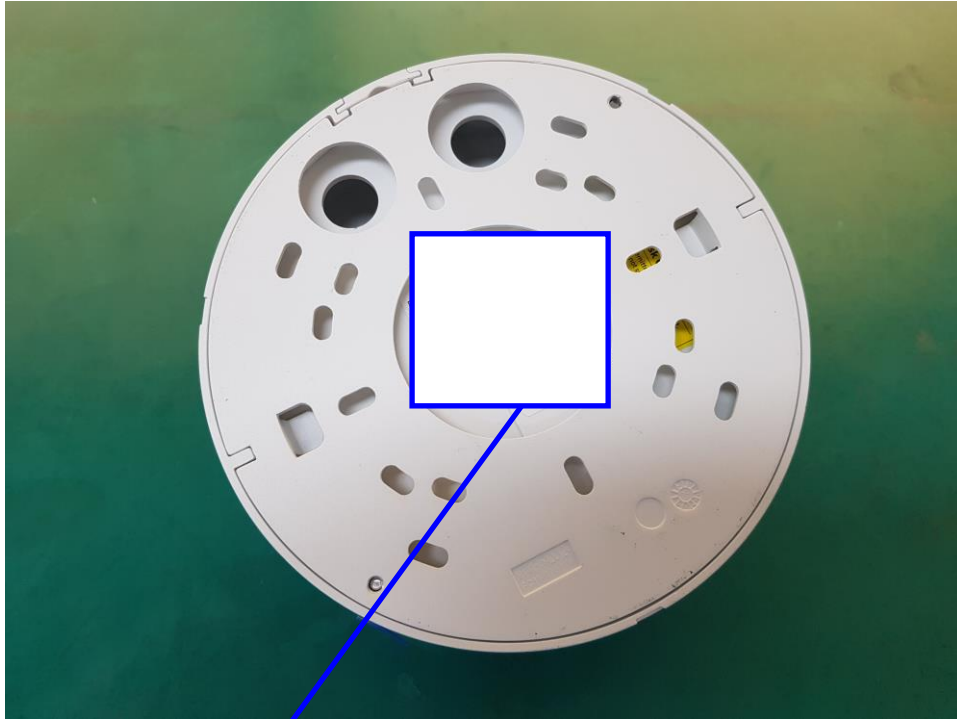

NETWORK CAMERA

Model No : XNF-9013RV

Manufacturer : HANVHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

UK CA **CE**